

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
16 September 2004 (16.09.2004)

PCT

(10) International Publication Number  
**WO 2004/079730 A1**

(51) International Patent Classification<sup>7</sup>: **G11B 7/007**

(74) Agent: **LEE, Young-Pil**; The Cheonghwa Building,  
1571-18, Seocho-dong, Seocho-gu, Seoul 137-874 (KR).

(21) International Application Number:  
PCT/KR2004/000419

(22) International Filing Date: 27 February 2004 (27.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10-2003-0012953 3 March 2003 (03.03.2003) KR  
10-2003-0016495 17 March 2003 (17.03.2003) KR  
10-2004-0005640 29 January 2004 (29.01.2004) KR

(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**  
[KR/KR]; 416, Maetan-dong, Yeongtong-gu, Suwon-si,  
Gyeonggi-do 442-742 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LEE, Kyung-Geun**  
[KR/KR]; 229-1006 Sibeom Woosung Apt., 16, Seohyun  
1-dong, Bundang-gu, Seongnam-si, Gyeonggi-do 463-050  
(KR). **KO, Jung-Wan** [KR/KR]; 315-401 Daewoo Apt.,  
956-2, Cheongmyung Maeul 3-danji, Yeongtong-dong,  
Yeongtong-gu, Suwon-si, Gyeonggi-do 443-737 (KR).  
**HWANG, Sung-Hee** [KR/KR]; 420-403 Jugong Apt.,  
189, Gaepo-dong, Gangnam-gu, Seoul 135-240 (KR).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,  
TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR MANAGING DISC DEFECT AND DISC THEREFOR

DRIVE & DISC  
INFORMATION  
AREA

WRITE PROTECT INFORMATION #0	TDFL #0 POINTER	TDDS #0 POINTER	...

(57) Abstract: A write once disc includes a defect management area that is present in at least one of a lead-in area and a lead-out area; a temporary defect management area that is present in at least one of the lead-in area and the lead-out area; and a drive & disc information area that is present in at least one of the lead-in area and the lead-out area. Information regarding the locations of temporary defect information and temporary defect management information is recorded in the drive & disc information area, the temporary defect information and temporary defect management information, which includes drive & disc information, are recorded in the temporary defect management area, and temporary defect information and temporary defect management information, which are lastly recorded in the temporary defect management area, are recorded in the defect management area for disc finalization.

WO 2004/079730 A1

**METHOD AND APPARATUS FOR MANAGING DISC DEFECT AND DISC THEREFOR**Technical Field

5           The present invention relates to disc defect management, and more particularly, to a disc with a temporary defect management area in which drive & disc information is recorded, and a disc defect management method and apparatus therefor.

Background Art

10           Disc defect management is the process of rewriting data stored in a user data area of a disc in which a defect exists to a new portion of the disc's data area, thereby compensating for data loss otherwise caused by the defect. In general, disc defect management is performed using a linear replacement method or a slipping replacement method. In the linear replacement method, a user data area in which a defect exists is  
15           replaced with a spare data area having no defects. In the slipping replacement method, a user data area with the defect is slipped and the next user data area having no defects is used.

          Both linear replacement and slipping replacement methods are, however, applicable only to discs such as a DVD-RAM/RW, on which data can be repeatedly  
20           recorded and recording can be performed using a random access method. In other words, the conventional linear and slipping replacement methods cannot be applied to write once discs on which recording is allowed only once. Specifically, the presence of defects in a disc is generally detected by recording data on the disc and confirming whether the data has been recorded correctly on the disc. However, once the data is  
25           recorded on a write once disc, it is impossible to overwrite new data and manage defects therein.

          After the development of write once discs Compact Disc (CD)-R and Digital Versatile Disc (DVD)-R, a high-density write once disc with a recording capacity of several dozen GBs has been introduced. This type of disc can be used as a backup  
30           disc since it is not expensive and allows random access that enables fast reading operations. However, disc defect management is not available for write once discs.

Therefore, a backup operation may be discontinued when a defective area (i.e., an area where a defect exists) is detected during the backup operation. Further, the backup operation is performed when a system is not frequently used (e.g., at night) when a system manager does not operate the system. In this case, it is more likely  
5 that the backup operation will be discontinued because a defective area of a write once disc is detected.

Meanwhile, when additional data will not be recorded on a recordable disc (i.e., when only data reproduction will be allowed), write protect information is recorded on the disc to prevent the data recorded on the disc from being mistakenly erased.

10 However, once the write protect information is recorded, recording is not further allowed, and, thus, possible disc defects cannot be managed. That is, since recording is not allowed in a data area of the disc after recording of the write protect information, disc defect management also cannot be performed.

#### 15 Disclosure of the Invention

An aspect of the present invention provides a write once disc, and a disc defect management method and apparatus therefor.

An aspect of the present invention also provides a write once disc and a disc defect management method and apparatus that can manage disc defects even when a  
20 disc defect is detected during a recording operation, allowing the recording operation to be performed without interruption.

An aspect of the present invention also provides a disc on which already-recorded write protect information can be changed, and a disc defect management method and apparatus therefor.

25 An aspect of the present invention also provides a disc on which disc defect management is allowed even after recording of write protect information, and a disc defect management method and apparatus therefor.

An aspect of the present invention also provides a disc, and a disc defect management method and apparatus that can increase a reliability of data stored in a  
30 disc.

Additional aspects and/or advantages of the invention will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the invention.

According to an aspect of the present invention, a write once disc includes a  
5 single record layer having, sequentially, a lead-in area, a data area, and a lead-out area, a defect management area in at least one of the lead-in area and the lead-out area, a temporary defect management area in at least one of the lead-in area and the lead-out area, and a drive & disc information area in at least one of the lead-in area and the lead-out area, where information regarding locations of temporary defect information  
10 and temporary defect management information is recorded in the drive & disc information area, the temporary defect information and temporary defect management information, which includes drive & disc information, are recorded in the temporary defect management area, and temporary defect information and temporary defect management information, which are last recorded in the temporary defect management area, are recorded in the defect management area during finalization of the disc.  
15

According to another aspect of the present invention, a write once disc has a first record layer having, sequentially, a lead-in area, a data area, and a lead-out area, a second record layer having, sequentially, an outer area, a data area, and a lead-out area, a defect management area in at least one of the lead-in area, the lead-out area,  
20 and the outer area; a temporary defect management area in at least one of the lead-in area, the lead-out area, and the outer area; and a drive & disc information area in at least one of the lead-in area, the lead-out area, and the outer area, where temporary defect information and temporary defect management information, which includes drive & disc information, are recorded in the temporary defect management area, temporary  
25 defect information and temporary defect management information, which are last recorded in the temporary defect management area, are recorded in the defect management area, for disc finalization, and information regarding the locations of the temporary defect information and temporary defect management information is recorded in the drive & disc information area.

30 According to an aspect of the invention, write protect information is further recorded in the drive & disc information area and recorded for every recording operation.

According to an aspect of the invention, the drive & disc information includes at least one of the write protect information and test location information.

According to yet another aspect of the present invention, a method of managing disc defects includes recording information regarding a defect in data, which is recorded in a data area of a disc according to an  $i$ th recording operation, as  $i$ th temporary defect information several times in a temporary defect management area of the disc; recording information for managing the  $i$ th temporary defect information as  $i$ th temporary defect management information in the temporary defect management area; recording information regarding locations of the  $i$ th temporary defect information and the temporary defect management information in a drive & disc information area of the disc; repeating the recording the  $i$ th temporary defect information, recording the  $i$ th temporary defect management information, and the recording information regarding the locations at least once while increasing an index  $i$  given to each subsequent recording operation, the temporary defect information, and the temporary defect management information; and recording a last recorded temporary defect information and temporary defect management information in a defect management area of the disc for disc finalization.

According to an aspect of the invention, the method further includes recording write protect information in the drive & disc information area.

During the recording the first temporary defect management information, the  $i$ th temporary defect management information is recorded to include at least one of test location information and the write protect information.

According to still another aspect of the present invention, a recording and/or reproducing apparatus includes a recording/reading unit that records data on or reads data from a disc; and a controller that controls the recording/reading unit to record data in a data area of the disc and information regarding a defect in the data recorded in the data area as temporary defect information in a temporary defect management area; to record management information for managing the temporary defect information as temporary defect management information in the temporary defect management area, the management information further including drive & disc information; to record information regarding locations of the temporary defect information and the temporary

defect management information in a drive & disc information area of the disc; and to record a last recorded temporary defect information and temporary defect management information in a defect management area of the disc during disc finalization.

According to an aspect of the invention, the controller controls the  
5 recording/reading unit to further record write protect information in the drive & disc information, controls the recording/reading unit to record the temporary defect information and the temporary defect management information for each recording operation, and controls the recording/reading unit to record the temporary defect management information to include test location information and write the protect  
10 information for each recording operation.

#### Brief Description of the Drawings

The above and/or other aspects and advantages of the present invention will become more apparent and more readily appreciated by describing in detail  
15 embodiments thereof with reference to the accompanying drawings in which:

FIG. 1 is a block diagram of a recording and/or reproducing apparatus according to an embodiment of the present invention;

FIGs. 2A through 2D illustrate structures of a disc according to embodiments of the present invention;

20 FIG. 3A illustrates a data structure of the disc shown in FIGs. 2A through 2D according to an embodiment of the present invention;

FIG. 3B illustrates a data structure of a disc with a drive & disc information area, a temporary defect management area (TDMA), and defect management areas (DMAs) as shown in FIG. 3A;

25 FIGs. 4A through 4D illustrate data structures of a TDMA where disc defect management has been performed, according to embodiments of the present invention;

FIGs. 5A and 5B illustrate data structures of a TDMA where disc defect management is not performed, according to embodiments of the present invention;

30 FIGs. 6A and 6B illustrate data structures of temporary defect management information TDDS #i according to embodiments of the present invention;

FIG. 7 illustrates a data structure of a temporary defect information TDFL #i according to an embodiment of the present invention;

FIGs. 8A and 8B illustrate data structures of a drive & disc information area according to embodiments of the present invention;

FIG. 9 illustrates diagrams for explaining recording of data in a user data area A and a spare area B according to an embodiment of the present invention;

FIG. 10 is a diagram illustrating an effective use of a data area according to an embodiment of the present invention;

FIG. 11 illustrates data structures of temporary defect information TDFL #0 and TDFL #1 according to an embodiment of the present invention;

FIG. 12 illustrates a data structure of information regarding defect #i according to an embodiment of the present invention;

FIGs. 13A and 13B shown a flowchart illustrating a disc defect management method according to an embodiment of the present invention; and

FIGs. 14A and 14B show a flowchart illustrating a disc defect management method according to another embodiment of the present invention.

#### Best mode for carrying out the Invention

Hereinafter, embodiments of the present invention will be described in a greater detail with reference to the accompanying drawings, wherein like reference numerals refer to the like elements throughout. The embodiments are described below in order to explain the present invention by referring to the figures.

FIG. 1 is a block diagram of a recording and/or reproducing apparatus according to an embodiment of the present invention. Referring to FIG. 1, the recording and/or reproducing apparatus includes a recording/reading unit 1, a controller 2, and a memory 3. The recording/reading unit 1 records data on a disc 100, which is an information storage medium according to an embodiment of the present invention. The recording/reading unit 1 also reads back the data from the disc 100 to verify the accuracy of the recorded data. The controller 2 performs disc defect management according to an embodiment of the present invention and controls the recording/reading unit 1 to record write protect information on the disc 100. In this embodiment, the controller 2 uses a verify-after-write method in which data is recorded on the disc 100 in predetermined units of data and the accuracy of the recorded data is verified to detect if an area of the disc 100 has a defect.

Specifically, the controller 2 records user data on the disc 100 in units of recording operations, and verifies the recorded user data to detect an area of the disc 100 in which a defect exists. Thereafter, the controller 2 creates information that indicates a position of the area with the defect, and stores the created information in the memory 3. When the stored information reaches a predetermined amount, the controller 2 records the stored information as temporary defect information on the disc 100. If a user will not perform the disc defect management, the controller 2 records only the temporary defect management information(which will be explained below) on the disc 100.

Generally, the recording operation is an operation unit determined according to a user's intention or is a recording work to be performed. According to the shown embodiment, a recording operation indicates a process in which the disc 100 is loaded into the recording and/or reproducing apparatus, data is recorded on the disc 100, and the disc 100 is taken out from the recording and/or reproducing apparatus. During the recording operation, data is recorded and verified at least once: In general, the data is recorded and verified several times. Defect information, which is obtained using the verify-after-write method, is temporarily stored as the temporary defect information in the memory 3. However, it is understood that the recording operation can be otherwise defined, and/or that the data does not need to be verified several times in all aspects of the invention.

When a user presses the eject button (not shown) of the recording and/or reproducing apparatus in order to remove the disc 100 after recording of data or when a recording operation is otherwise to end, the controller 2 expects a recording operation to be terminated. Next, the controller 2 reads the information from the memory 3, provides the read information to the recording/reading unit 1, and controls the recording/reading unit 1 to record the read information on the disc 100. Further, as will be explained later, information regarding the temporary defect information and the temporary defect management information, and the write protect information are recorded in a drive & disc information area of the disc 100.

When the recording of data is completed (i.e., additional data will not be recorded on the disc 100 and the disc 100 needs to be finalized), the controller 2 controls the recording/reading unit 1 to rewrite the recorded temporary defect



information and temporary defect management information in a defect management area (DMA) of the disc 100 as defect management information.

During reproduction, the controller 2 controls the recording/reading unit 1 to read information regarding a defect in the data recorded in the data area, as temporary defect information from a temporary defect management area (TDMA) of the disc 100. The controller 2 further controls the recording/reading unit 1 to read management information for managing the temporary defect information as temporary defect management information from the TDMA of the disc 100. The read management information includes drive & disc information. The controller 2 controls the recording/reading unit 1 to read information regarding locations of the temporary defect information and the temporary defect management information from a disc & drive information area of the disc 100. Further, in the case that the disc 100 is finalized, the controller 2 controls the recording/reading unit 1 to read a last recorded temporary defect information and a last recorded temporary defect management information from a defect management area (DMA) of the disc 100. The controller 2 also controls the recording/reading unit 1 to read write protect information and test location information from the drive & disc information.

FIGs. 2A through 2D illustrate structures of the disc 100 of FIG. 1 according to embodiments of the present invention. FIG. 2A illustrates in detail a disc 100 having a record layer L0 (a single record layer disc). The disc 100 includes a lead-in area, a data area, and a lead-out area. The lead-in area is located in an inner part of the disc 100, and the lead-out area is located in an outer part of the disc 100. The data area is present between the lead-in area and the lead-out area and is divided into a user data area and a spare area. The user data area is an area where user data is recorded. The spare area is a replacement area for a user data area having a defect, and serves to compensate for a loss in the recording area due to the defect. That is, the spare area is used for the disc defect management according to an aspect of the present invention such that, when a defect exists in data recorded in the user data area, the data is recorded again in the spare area.

A data structure of the disc 100 shown in FIG. 2B is the same as that of the disc 100 of FIG. 2A except that a data area includes two spare areas. Therefore, a description of each area shown in FIG. 2B will be omitted. In FIG. 2B, the spare areas

are located at the sides of the user data area. In the shown embodiment, the spare area between the lead-in area and the user data area will be referred to as an inner spare area, and the spare area between the user data area and the lead-out area will be referred to as an outer spare area. However, it is understood that other spare areas can be used and/or can be disposed in areas other than the inner and outer areas of the user data area.

FIG. 2C illustrates a disc 100 having first and second record layers L0 and L1 (a double record layer disc). The first record layer L0 has a lead-in area, a data area, and an outer area sequentially formed from the inner part of the first record layer L0 to the outer part. Also, the second record layer L1 has an outer area, a data area, and a lead-out area sequentially formed from the outer part of the second record layer L1 to the inner part. Unlike the single record layer discs shown in FIGs. 2A and 2B, the lead-out area is present in the inner part of the disc 100 of FIG. 2B. That is, the disc 100 of FIG. 2B has an opposite track path (OTP) in which data is recorded starting from the lead-in area of the first record layer L0 toward its outer area and continuing from the outer area of the second record layer L1 to its lead-out area. A spare area is allotted to each of the record layers L0 and L1.

A data structure of the disc 100 shown in FIG. 2D is the same as that of the disc 100 of FIG. 2C, except that the first record layer L0 and the second record layer L1 each further include another spare area such that the disc 100 includes four spare areas. Therefore, a description of each spare area will be omitted here. The spare areas are formed at the sides of the user data areas of the first and second record layers L0 and L1. In this disclosure, the spare areas adjacent to an inner part of the disc 100 will be referred to as inner spare areas and the spare areas adjacent to an outer part of the disc 100 will be referred to as outer spare areas. If necessary, a portion of the user data area may be used as another spare area. The location and numbers of the spare area are not limited to the above description.

FIG. 3A illustrates structures of the disc 100 of FIGS. 2A through 2D, according to an embodiment of the present invention. Referring to FIG. 3A, if the disc 100 is a single record layer disc 100 shown in FIGS. 2A and 2B, a drive & disc information area, a DMA, and a temporary DMA (TDMA) are present in at least one of the lead-in area and the lead-out area of the disc 100. If the disc 100 is a double record layer disc 100

shown in FIGS. 2C and 2D, the drive & disc information area, the DMA, and the TDMA are present in at least one of the lead-in area, the lead-out area, and the outer area, and preferably are in the lead-in area and the lead-out area, which are located in the inner part of the disc 100, respectively. However, it is understood that the drive & disc information area can be otherwise located in other aspects of the invention.

In the drive & disc information area, there are recorded information regarding a drive used for a write and/or read operation, information regarding a disc (e.g., whether the disc is a single record layer disc or a double record layer disc), and information regarding a location of a test area where recording conditions are tested. In particular, the disc information specifies disc defect management according to an aspect of the present invention. For instance, the disc information may include location information regarding temporary defect information and temporary defect management information, and the write protect information. However, it is understood that the drive & disc information area could include additional information related to the drive & disc information.

In general, the DMA includes information relating to managing disc defects in the disc 100. Such information includes the structure of the disc 100 for disc defect management, the recording position of defect information, whether defect management is performed or not, and the position and size of a spare area. In the TDMA, information regarding disc defects is recorded before disc finalization. The information regarding disc defects includes the drive & disc information (i.e., the information regarding the location of the test area and the write protect information).

In general, when the disc 100 is loaded into a recording/reading apparatus such as that shown in FIG. 1, the apparatus reads data from a lead-in area and a lead-out area of the disc 100 to determine how to manage the disc 100 and record data on or read data from the disc 100. However, if the amount of data recorded in the lead-in area and/or the lead-out area increases, a longer time is spent on preparing the recording or reproducing of data after the loading of the disc 100. To solve this problem, an aspect of the present invention uses temporary defect management information and temporary defect information that are to be recorded in the TDMA. The TDMA is allotted to the lead-in area and/or the lead-out area of a disc, being separated from the DMA. That is, when additional data will not be recorded on the disc (i.e., disc

finalization is required), only a last recorded defect information and defect management information are recorded in the DMA, thus enabling the recording/reading apparatus to read only the last recorded defect management information from the DMA.

Accordingly, it is possible to accelerate disc initialization. Further, since the defect management information is recorded in a plurality of areas, the reliability of information can be increased.

According to an aspect of the present invention, the defect management information, the location information regarding the temporary defect information and the temporary defect management information, and the write protect information are recorded in the drive & disc information area. Accordingly, the recording/reading apparatus reads the location information from the drive & disc information area, and can therefore access the DMA more rapidly based on the read location information. That is, the disc defect management can be more efficiently performed based on the location information.

Also, the drive & disc information (including location information regarding the test area and the write protect information) is recorded in the temporary defect management information. Therefore, even if a disc drive does not access the drive & disc information area, the location information regarding the test area and the write protect information can be obtained from the temporary defect management area. Inclusion of the test location information into the temporary defect management information enables quick finding of a pointer to the test location information.

In the shown embodiment, since disc defect management is performed using the linear replacement method, the temporary defect information includes information indicating a position of an area of the disc 100 having a defect and information indicating a position of an area of the disc 100 that is replacement for the area having the defect. More preferably, the temporary defect information further includes information indicating whether the defect occurs in a single defect blocks or continuous defect blocks. The temporary defect management information is used to manage the temporary defect information and includes information indicating the position of the disc 100 where the temporary defect information is recorded. More preferably, the temporary defect management information further includes the location information regarding the test area and the write protect information. Detailed data structures of

the temporary defect information and the temporary defect management information will be explained below.

In the shown embodiment, the temporary defect information and temporary defect management information are recorded every time when a recording operation ends. In the TDMA, therefore, information regarding a defect, which occurs in data recorded during recording operation #0, and information regarding a replacement area are recorded as temporary defect information #0. Information regarding a defect, which occurs in data recorded during recording operation #1, and information regarding a replacement area are recorded as temporary defect information #1. Further, information for managing temporary defect information #0, #1, ... is recorded as temporary defect management information #0, #1, ... in the TDMA. When additional data cannot be recorded in the data area or when a user does not wish to record additional data therein (i.e., the data needs to be finalized), the temporary defect information recorded in the temporary defect information area and the temporary defect management information recorded in the temporary defect management information area are rewritten to the DMA.

In the shown embodiment, all defect information contained in previously recorded temporary defect information #0, #1, #2, ..., #i-1 is further contained in temporary defect information #i. Thus, it is easy to finalize the disc 100 just by reading defect information contained in a last recorded temporary defect information #i and rewriting the read temporary defect information #1 to the DMA. However, it is understood that the temporary defect information #i need not include all prior defect information in all aspects of the invention.

In the case of a high-density disc 100 with a recording capacity of several dozens of GBs such as a Blu-Ray disc or an Advance Optical Disc (AOD), it is desirable that a cluster is allocated to an area in which the temporary defect management information #i is recorded and four to eight clusters are allocated to an area in which temporary defect information #i is recorded. This is because it is preferable to record new information in units of clusters to update information when a minimum physical unit of record is a cluster, although the amount of temporary defect information #i is just several KBs. While not required in all aspects, a total amount of defects allowed in a disc is preferably about 5 % of the disc recording capacity. For instance, about four to

eight clusters are required to record temporary defect information #i, considering that information regarding a defect is about 8 bytes long and the size of a cluster is 64 KBs.

However, it is understood that additional percentages of disc recording capacity can be used according to need, and that the new information need not be recorded in clusters in all aspects of the invention.

The verify-after-write method can also be performed on the temporary defect information #i and the temporary defect management information #i. When a defect is detected, information recorded in an area of the disc 100 having a defect may be either recorded in a spare area using the linear replacement method, or recorded in an area adjacent to the TDMA using the slipping replacement method.

In the shown embodiment, the drive & disc information area and the TDMA are separate areas. However, it is understood that the areas may be formed as a single area. In the latter case, a part of the drive & disc information (e.g., the location information regarding the test area and the write protect information), which needs to be updated is updated and recorded together with the temporary defect management information.

FIG. 3B illustrates a data structure of the disc 100 with a drive & disc information area, a TDMA, and DMAs as shown in FIG. 3A. Referring to FIG. 3B, two DMAs, DMA 1 and DMA 2, are formed to increase the robustness of defect management information, the defect information, and the write protect information. FIG. 3B also shows a temporary defect management area TDMA, a test area Test in which recording conditions of data are measured, and a drive and disc area Drive and Disc information in which the drive & disc information is recorded and which is located beside a buffer area Buffer 2 beside the DMA DMA1. Buffer 1, Buffer 2, and Buffer 3 are areas acting as buffers that indicate borders of the respective areas. A disc 100 according to embodiments of the present invention may include a plurality of the drive & disc information areas.

FIGs. 4A through 4D illustrate data structures of a TDMA where disc defect management has been performed, according to embodiments of the present invention.

Referring to FIG. 4A, the TDMA is logically divided into a temporary defect information area and a temporary defect management information area. In the temporary defect

information area, temporary defect information TDFL #0, TDFL #1, TDFL #2, ... are sequentially recorded starting from a start of the area toward the end, such that the physical or logical addresses of the temporary defect information increase. The temporary defect information TDFL #0, TDFL #1, TDFL #2, ... are repeatedly recorded several times to increase the robustness of information. In particular, FIG. 4A illustrates recording the temporary defect information TDFL #0 P times. In the temporary defect management information area, the temporary defect management information TDDS #0, TDDS #1, TDDS #2, ... are sequentially recorded starting from the start of the area. The temporary defect management information TDDS #0, TDDS #1, and TDDS #2 correspond to the temporary defect information TDFL #0, TDFL #1, and TDFL #2, respectively.

Referring to FIG. 4B, compared to FIG. 4A, the TDMA is also logically divided into a temporary defect information area and a temporary defect management information area. However, the sequences of recording information are not the same. More specifically, in the temporary defect information area, the temporary defect information TDFL #0, TDFL #1, TDFL #2, ... are sequentially recorded starting from the end of the area toward the start such that the physical or logical addresses of the temporary defect information decrease. Similarly, the temporary defect information TDFL #0, TDFL #1, TDFL #2, ... is repeatedly recorded several times to increase the robustness of information. In particular, FIG. 4B illustrates recording the temporary defect information TDFL #0 P times. In the temporary defect management information area, temporary defect management information TDDS #0, TDDS #1, TDDS #2, ... are sequentially recorded starting from the end of the area. The temporary defect management information TDDS #0, TDDS #1, and TDDS #2 correspond to the defect information TDFL #0, TDFL #1, and TDFL #2, respectively.

Referring to FIG. 4C, corresponding temporary defect information and temporary defect management information are recorded as pairs of information in the TDMA. More specifically, the temporary management information TDMA #0, TDMA #1, ... are sequentially recorded starting from the start of the TDMA such that the physical or logical addresses of the temporary management information increase. The temporary management information TDMA #0 contains a pair of corresponding temporary defect management TDDS #0 and temporary defect information TDFL #0,

and temporary management information TDMA #1 contains a pair of corresponding temporary defect management information TDDS #1 and temporary defect information TDFL #1. The temporary defect information TDFL #0, TDFL #1, TDFL #2, ... are repeatedly recorded several times to increase the robustness of information. In particular, FIG. 4C illustrates recording the temporary defect information TDFL #0 P times.

Referring to FIG. 4D, compared to the TDMA of FIG. 4C, corresponding temporary defect information and temporary defect management information are recorded as pairs of information in a TDMA. However, the sequence of recording the information is not the same. More specifically, in the TDMA, the temporary management information TDMA #0, TDMA #1, ... are sequentially recorded starting from the end of the TDMA such that the physical or logical addresses of the temporary management information decrease. The temporary management information TDMA #0 contains a pair of corresponding temporary defect management information TDDS #0 and temporary defect information TDFL #0, and the temporary management information TDMA #1 contains a pair of corresponding temporary defect management information TDDS #1 and temporary defect information TDFL #1. Similarly, the temporary defect information TDFL #0, TDFL #1, TDFL #2, ... are repeatedly recorded several times to increase the robustness of information. In particular, FIG. 4D illustrates recording of the temporary defect information TDFL #0 P times.

FIGs. 5A and 5B illustrate data structures of a TDMA where disc defect management is not performed, according to embodiments of the present invention. Referring to FIG. 5A, when a user decides not to perform disc defect management, the temporary defect management information is recorded in the TDMA in recording operation units. More specifically, the temporary defect management information TDDS #0, TDDS #1, ... are recorded starting from the start of the TDMA such that the physical or logical addresses of the temporary defect management information increase.

Referring to FIG. 5B, when the user decides not to perform disc defect management, the temporary defect management information is recorded in the TDMA in recording operation units. However, unlike in the FIG. 5A, the temporary defect management information starting from the TDDS #0, TDDS #1, ... are recorded starting



from the end of the TDMA such that the physical or logical addresses of the temporary defect management information decrease.

FIGs. 6A and 6B illustrate data structures of temporary defect management information TDDS #i. In detail, FIG. 6A illustrates a data structure of temporary defect management information TDDS #i recorded on a single record layer disc 100 such as that shown in FIGs. 2A and 2B. The temporary defect management information TDDS #i contains an identifier for temporary defect management information TDDS #i, and information regarding the position of corresponding temporary defect information TDFL #i. As previously explained with reference to FIGs. 4A through 4D, temporary defect information TDFL #i according to an aspect of the present invention is repeatedly recorded several times. Thus, the information regarding the position of temporary defect information TDFL #i includes pointers corresponding to temporary defect information TDFL #i, and each pointer is to the recording position of each temporary defect information TDFL #i. Temporary defect management information TDDS #i shown in FIG. 5A includes P pointers to temporary defect information TDFL #i recorded P times.

Also, the temporary defect management information TDDS #i recorded on the single record layer disc 100 describes the address of user data, which is last recorded in a user data area of a record layer L0, and the address of the replacement area which is last recorded in a spare area of the record layer L0. Accordingly, a user can easily utilize the disc 100 just by referring to the last recorded user data area and replacement area.

The temporary defect management information TDDS #i further includes test location information #i and write protect information #i. Accordingly, even if a disc drive does not access the drive & disc information area or the disc defect management is not performed, it is possible to directly access a testable area without detecting the testable area while scanning the test area where recording conditions are tested. Also, it is possible to avoid recording in an undesired area.

A reason for including the test location information into the temporary defect management information will now be described in a greater detail. As described above, the temporary management information contains the temporary defect

management information and the temporary defect information, and further contains recording management information that is not shown in the drawings. According to an aspect, the recording management information is a space bit map (SBM). The SBM indicates whether data is recorded in an area of a recording medium on a recording block basis using bit values. The temporary management information is recorded in the temporary defect management information area (TDMA).

For effective use of the TDMA, when updating of a portion of the temporary management information is required, only the portion is updated in the TDMA. When the temporary defect information needs to be updated but the SBM does not need to be updated, only the temporary defect information is updated in a next available area of the TDMA. In this case, the recording location of last recorded temporary defect information changes. Thus, the temporary defect management information needs to be updated. Similarly, when updating of the SBM is required but that of the temporary defect information is not required, only the SBM is updated in a next available area of the TDMA. In this case, the updating of the temporary defect management information is also required, since a recording location of a last recorded SBM changes.

As described above, the temporary defect management information must also be updated when updating only a portion of temporary management information recorded in the TDMA since the temporary defect management information must specify location information regarding the updated portion. In other words, when disc 100 is loaded into a drive system, it is difficult for the drive system to detect last recorded temporary management information. To solve this problem, location information regarding respective information contained in the temporary management information are included in the temporary defect management information and the temporary defect management information is recorded at an end of the TDMA. Accordingly, the drive system can easily detect the last recorded temporary management information by reading the location information regarding the last recorded temporary management information from the temporary defect management information. In this regard, the temporary defect management information is recorded sequentially in the TDMA.

The drive system is capable of distinguishing between an area containing data and an area containing no data in the temporary defect management information, and

detecting a last recorded data block. It is possible to determine whether an area of a disc contains data by reading a radio frequency (RF) signal from the disc 100. Therefore, when the test location information is included into the temporary management information, it is best to record the test location information in the temporary defect management information.

The test location information is recorded in the temporary defect management information because, when the disc 100 is loaded into the drive system, the drive system reads temporary management information last recorded on the disc 100 by accessing a data block last recorded in the TDMA, detecting the temporary defect management information from the data block, and detecting the last recorded temporary management information from the temporary defect management information. The drive system performs a write/read operation based on the last recorded temporary defect management information. For this reason, the test location information is contained in last recorded temporary defect management information TDDS #i that the disc drive must first detect in order to record data on or read data from the disc 100, thereby allowing easy detection of both the location information regarding temporary defect information TDFL#i and the test location information at once.

Inclusion of the test location information in the temporary defect management information TDDS#i allows the test location information to be easily detected from the TDMA based on an address of the last recorded temporary defect management information TDDS #i, regardless of whether another temporary management information is updated. If the test location information is recorded in an area other than the last recorded temporary defect management information TDDS #i, the last recorded temporary defect management information TDDS #i must further include a pointer to this area for detection of the test location information. In this case, for the detection of the test location information, the last recorded temporary defect management information TDDS #i is detected to obtain the pointer to the area containing the test location information, and the area containing the test location information is detected using the pointer, thereby causing overhead.

FIG. 6B illustrates a data structure of temporary defect management information TDDS #i recorded on a double record layer disc 100 such as that shown in FIGs. 2C and 2D. Temporary defect management information TDDS #i contains an

identifier for the temporary defect management information TDDS #i, and information regarding the recording position of corresponding temporary defect information TDFL #i.

As previously mentioned with reference to FIGs. 4A through 4D, the temporary defect information TDFL #i according to an embodiment of the present invention is repeatedly recorded several times. Thus, the information regarding the recording position of the temporary defect information TDFL #i contains pointers to the recording positions of respective temporary defect information TDFL #i. In particular, the temporary defect management information TDDS #i shown in FIG. 5B includes P pointers, each pointer to each of temporary defect information TDFL #i that is repeatedly recorded P times.

Also, the temporary defect management information TDDS #i recorded on a double record layer disc 100 describes the address of user data that is last recorded in a user data area of a first record layer L0, the address of replacement that is last recorded in a spare area of the first record layer L0, the address of user data that is last recorded in a user data area of a second record layer L1, and the address of replacement that is last recorded in a spare area of the second record layer L1. Accordingly, a user can easily utilize the disc 100 just by referring to the last recorded user data and replacement.

Similarly to the single record layer disc 100, the temporary defect management information TDDS #i further includes test location information #i and write protect information #i. Accordingly, even if a disc drive does not access the drive & disc information area or the disc defect management is not performed, it is possible to directly access a testable area without detecting the testable area while scanning the test area where recording conditions are measured. Also, it is possible to avoid recording in an undesired area.

FIG. 7 illustrates a data structure of temporary defect information TDFL #i. Referring to FIG. 7, temporary defect information TDFL #i contains an identifier for temporary defect information TDFL #i, and information regarding defects #1, #2,..., #k. The information regarding defects #1, #2,..., #k is state information indicating the positions of defects and replacements, and whether a defective area includes a single defect block or continuous defect blocks.

FIGs. 8A and 8B illustrate data structures of a drive & disc information area according to embodiments of the present invention. Referring to FIG. 8A, write protect information #i, a pointer to the location of temporary defect information TDFL #i, and a pointer to the location of temporary defect management information TDDS #i are recorded in recording operation units in the drive & disc information area, when the temporary defect information TDFL #i and the temporary defect management information TDDS #i are separately recorded in a TDMA as shown in FIG. 4A or 4B. Referring to FIG. 8B, write protect information #i and a pointer to the location of temporary management information area TDMA #i are recorded in recording operation units in the drive & disc information area, when the temporary defect information TDFL #i and temporary defect management information TDDS #i are recorded to be included in the temporary management information area TDMA #i in the TDMA as shown in FIG. 4C or 4D.

According to an embodiment of the present invention, the write protect information (which is recorded in the drive & disc information area and the temporary defect management information TDDS #i) does not allow additional data to be recorded on the disc 100. The write protect information may include flag information that indicates whether write protection is enabled or disabled on the entire disc 100, and information that indicates recordable areas even if write protection is enabled. For instance, a first bit of the write protect information is set as the flag information that indicates whether write protection is enabled or disabled, and each of the other bits is set to indicate whether at least one predetermined area is recordable or not. If the write protection is enabled, a second bit of the write protect information may indicate whether the drive & disc information area is recordable or not. Otherwise, the second bit may indicate whether the drive & disc information area is recordable or not, and a third bit may indicate whether a DMA is recordable or not. The third and fourth bits may indicate whether the DMA and a spare area are recordable or not.

When the write protect information is recorded, the following areas can be recordable according to aspects of the invention.

In one area, data recording is allowed in the drive & disc information area, even if the write protect information is recorded on the disc 100 and additional data cannot be further recorded. In other words, the drive & disc information area is not

affected by the write protect information recorded to enable write protection. Accordingly, it is possible to change the write protect information.

5 In another area, even if the write protect information is recorded to enable write protection, a part of the drive & disc information area allocated for the write protect information is not affected by the write protection. In other words, data recording is allowed in the part of the drive & disc information area. Thus, the write protect information can be changed.

10 In a further area, even if the write protect information is recorded to enable write protection, a temporary defect management area (TDMA), the drive & disc information area, and a spare area are not affected by the write protection (i.e., data recording is allowed in these areas). Thus, the write protect information can be changed. Further, disc defect management can be performed even after recording of the write protect information.

15 If a rate of error correction in a data block of a user data area is lower than a predetermined reference value when reproducing data stored in the user data area, disc defect management can be performed such that the data block is regarded as an area where the probability of error occurrence is higher, data stored in the data block is rewritten to the spare area before reproduction of the data, and the data block is determined to be a defective area.

20 If the disc 100 includes more than one spare area, at least one area of the spare areas is determined to be a recordable area according to an aspect of the invention.

25 Areas in which data recording is allowed even if the write protect information is recorded, are not limited to the above description. That is, the number and type of the areas can be adjusted if necessary.

FIG. 9 is a reference diagram illustrating in detail recording of data in a user data area A and a spare area B, according to an embodiment of the present invention. Data can be processed in units of sectors or clusters. A sector denotes a minimum unit of data that can be managed in a file system of a computer or in an application. A

cluster denotes a minimum unit of data that can be physically recorded on a disc at once. In general, one or more sectors constitute a cluster.

There are two types of sectors: a physical sector and a logical sector. The physical sector is an area on a disc where a sector of data is to be recorded. An address for detecting the physical sector is called a physical sector number (PSN). The logical sector is a unit in which data can be managed in a file system or an application. An address for detecting the logical sector is called a logical sector number (LSN). A disc recording/reading apparatus detects the recording position of data on a disc using the PSN. In a computer or a data application, the entire data is managed in units of the LSNs and the position of data is detected using an LSN. The relationship between the LSN and the PSN is changed by a controller of the recording/reading apparatus, based on whether the disc contains a defect and an initial position of recording data.

Referring to FIG. 9, A denotes a user data area and B denotes a spare area in which PSNs are sequentially allocated to a plurality of sectors (not shown). In general, each LSN corresponds to at least one PSN. However, since LSNs are allocated to non-defective areas, including replacements recorded in the spare area, the correspondence between the PSNs and the LSNs is not maintained when the disc has a defective area. This is true even if the size of the physical sector is the same as that of the logical sector.

In the user data area A, user data is recorded either in a continuous recording mode or a random recording mode. In the continuous recording mode, the user data is recorded sequentially and continuously. In the random recording mode, user data is randomly recorded. In the data area A, sections 1001 through 1007 denote predetermined units of data in which the verify-after-write method is performed. A recording and/or reproducing apparatus records user data in section 1001, returns to the start of section 1001, and checks if the user data is appropriately recorded or a defect exists in section 1001. If a defect is detected in a portion of section 1001, the portion is designated as defect #1. The user data recorded in defect #1 is also recorded on a portion of the spare area B. Here, the portion of the spare area B in which data recorded in defect #1 is rewritten is called replacement #1. Next, the recording and/or reproducing apparatus records user data in section 1002, returns to the start of section 1002, and checks whether the data is properly recorded or a defect exists in section

1002. If a defect is detected in a portion of section 1002, the portion is designated as defect #2. Likewise, replacement #2 corresponding to defect #2 is formed in the spare area B. Further, defect #3 and replacement #3 are designated in section 1003 of the user data area A and the spare area B, respectively. In section 1004, a defect does not occur and a defective area is not designated.

The recording and/or reproducing apparatus records information regarding defect #1, #2, and #3 occurring in sections 1001 through 1004 as temporary defect information TDFL #0 in the TDMA, when recording operation #0 is expected to end, after the recording and verifying of data to section 1004 (i.e., when a user presses the eject button of a recording and/or reproducing apparatus or recording of user data allocated in a recording operation is complete). Also, management information for managing temporary defect information TDFL #0 is recorded as temporary defect management information TDDS #0 in the TDMA.

When recording operation #1 starts, data is recorded in sections 1005 through 1007, and defects #4 and #5 and replacements #4 and #5 are formed in the user data area A and the spare area B, respectively, as explained in sections 1001 through 1004. Defects #1, #2, #3, and #4 occur in the single blocks, whereas defect #5 occurs in continuous defect blocks. Replacement #5, which is replacement for defect #5, is recorded in continuous replacement blocks. Here, a block refers to a physical or logical record unit, a range of a unit block being not limited. If the second recording operation is expected to end, the recording and/or reproducing apparatus records information regarding defects #4 and #5 as temporary defect information TDFL #1, and records the information contained in the defect information DFL #1 once again. Thereafter, management information for managing temporary defect information TDFL #1 is recorded as temporary defect management information #1 in the TDMA.

For disc finalization, last recorded temporary defect information and temporary defect management information are recorded as defect information and defect management information in a defect management area (DMA), respectively. Also, information regarding the recording positions of the last recorded temporary defect information and temporary defect management information, and the above write protect information are further recorded in the TDMA.



FIG. 10 is a diagram illustrating an effective use of a user data area according to an aspect of the present invention. FIG. 10 reveals that an available portion of a user data area can easily be detected with the address of user data that is lastly recorded in the user data area and the address of replacement that is lastly recorded in the spare area. In particular, the available portion can be more easily detected when the user data is recorded from the inner part/outer part of the user data area to its outer part/inner part and data, which is a replacement for a defect, is recorded from the outer part/inner part of the spare area to its inner part/outer part, respectively. In other words, the user data and the data for replacement are preferably recorded in opposite recording directions.

When the physical addresses of the user data are increased from the inner part of the record layer L0 to the outer part and increased from the outer part of the record layer L1 to the inner part, the physical address of the data which is lastly recorded in the user data areas of record layers L0 and L1 has the largest number. Also, the last recorded replacement has the physical address with the smallest number, when physical addresses of replacements are reduced from the outer part to the inner part in a spare area of the record layer L0 and increased from the inner part to the outer part in a spare area of the record layer L1. Accordingly, if the addresses of the last recorded data and replacement areas are included in the temporary defect management information TDDS #i, as shown in FIGs. 6A and 6B it is possible to detect the positions of data and replacement that are to be newly recorded, without completely reading temporary defect information TDFL #i and estimating the positions of the defect and replacement. Further, available portions of the user data area and the spare area are located continuously, thereby enabling effective use of the user area. For this reason, additional data can be recorded or changed even after recording write protect information during disc finalization, and disc defect management can be more effectively performed.

FIG. 11 illustrates data structures of temporary defect information TDFL #0 and TDFL #1. Referring to FIG. 11, temporary defect information TDFL #0 contains information regarding defects #1, #2, and #3. The information regarding defect #1 indicates the position of an area in which defect #1 exists and the position of an area in which replacement #1 is recorded. The information regarding defect #1 may further

include information indicating whether defect #1 occurs in continuous defect blocks or a single defect block according to aspects of the invention. Likewise, the information regarding defect #2 indicates whether defect #2 occurs in continuous defect blocks or a single defect block, the position of an area in which defect #2 exists, and the position of an area in which replacement #2 is recorded. The information regarding defect #3 indicates whether defect #3 occurs in continuous defect blocks or a single defect block, the position of an area in which defect #3 exists, and the position of an area in which replacement #3 is recorded.

In the shown embodiment, the temporary defect information TDFL #1 further contains information regarding defects #4 and #5 in addition to the information contained in temporary defect information TDFL #0. More specifically, the temporary defect information TDFL #1 includes the information regarding defect #1, the information regarding defect #2, the information regarding defect #3, the information regarding defect #4, and the information regarding defect #5. However, this cumulative recording is not required in all aspects of the invention.

FIG. 12 illustrates a data structure of information regarding defect #i. Referring to FIG. 12, information regarding defect #i includes state information indicating whether defect #i occurs in continuous defect blocks or a single defect block, a pointer to defect #i, and a pointer to replacement #i. When the defect #i is determined to occur in the continuous defect blocks, the state information further represents whether pointer to defect #i points to the start or end of the continuous defect blocks and whether pointer for the replacement #i points out the start or end of a replacement block that replaces the defect #i. When the state information indicates the pointer for defect #i as the start of the continuous defect blocks and the pointer for replacement #i as the start of the replacement block, the pointer for defect #i represents a starting physical sector number of the continuous defect blocks and the pointer for replacement #i represent a starting physical sector number of replacement #i. In contrast, when the state information indicates the pointer for defect #i as the end of the continuous defect blocks and the pointer for replacement #i as the end of the replacement block, the pointer for defect #i represents an ending physical sector number of the continuous defect blocks and the pointer for replacement #i represent an ending physical sector number of replacement #i. The definition of continuous defect

blocks using state information enables effectively recording of information and saves a space of recording, even if information regarding defects is not recorded in units of blocks.

5 The pointer for defect #i specifies a starting and/or ending point(s) of the defect #i. The pointer for defect #i may include the starting PSN of defect #i according to an aspect of the invention. The pointer for replacement #i specifies starting and/or ending points of replacement #i. The pointer for replacement #i may also include the starting PSN of the replacement #i.

10 Hereinafter, a disc defect management method according to an embodiment of the present invention will be described with reference to the flowchart shown in FIGs. 13A and 13B Referring to FIGs. 13A and 13B, a recording and/or reproducing apparatus such as that shown in FIG. 1 records defect information regarding data, which is recorded according to a first recording operation, as first temporary defect information in a TDMA of the disc 100 (operation 1301). This process serves to  
15 manage the disc defects. The controller 1 of the recording and/or reproducing apparatus controls the recording/reading unit 2 to record management information for managing the first temporary defect information as first temporary defect management information in the TDMA (operation 1302). As described above, the first temporary defect management information includes drive & disc information (i.e., test location  
20 information or write protect information) according to an aspect of the invention. Next, information regarding the locations of the first temporary defect information and the first temporary defect management information is recorded in the drive & disc information area (operation 1303). Then, the write protect information is further recorded in the drive & disc information area (operation 1304).

25 Next, it is checked whether disc finalization is required (operation 1305). If it is determined in operation 1305 that disc finalization is not required, operations 1301 through 1304 are repeated while increasing indexes i given to a recording operation, temporary defect information, and temporary defect management information by 1 (operation 1306). However, if it is determined in operation 1305 that disc finalization is  
30 required, the last recorded temporary defect management information and temporary defect information are recorded in the DMA (operation 1307). That is, the last recorded temporary defect management information and temporary defect information

are recorded as final defect management information and defect information in the DMA, respectively. The final defect information and defect management information may be repeatedly recorded to increase the reliability of data detection.

Further, while not required in all aspects of the invention, the verify-after-write method may be performed on the final defect management information and defect information. If a defect is detected from the final defect management information, an area of the disc 100 having the defect and the following area containing data may be regarded as being unavailable (i.e., they are designated as a defective area), and the final temporary defect management information and temporary defect information are again recorded after the defective area. Alternatively, the write protect information, which is recorded in the drive & disc information area or included in lastly recorded temporary defect management information TDDS#i, may further be recorded in the DMA according to another aspect of the invention.

FIGs. 14A and 14B show a flowchart illustrating a disc defect management method according to another embodiment of the present invention. Referring to FIGs. 14A and 14B, a recording and/or reproducing apparatus such as that shown in FIG. 1 records user data in a data area of a disc in units of data to facilitate the verify-after-write method (operation 1401). The data recorded in operation 1201 is verified to detect an area of the disc 100 having a defect (operation 1402). Controller 2 of FIG. 1 designates the area having the defect as a defective area, controls the recording/reading unit 1 to rewrite data recorded in the defective area to a spare area so as to create a replacement area the controller 2 further controls the recording/reading unit1 to create state information specifying whether the defective area includes a single defect block or continuous defect blocks, and pointer information that points the positions of the defective area and the replacement area (operation 1403). The state information and the pointer information are stored as first temporary defect information in memory (operation 1404). It is checked whether the first recording operation is expected to end (operation 1405).

If it is determined in operation 1405 that the first recording operation is not expected to end, operations 1401 through 1404 are repeated. If it is determined in operation 1405 that the first recording operation is likely to end (i.e., when the recording of the user data is complete by user input or according to the first recording operation),

the stored temporary defect information is read and repeatedly recorded as first temporary defect information TDFL #0 in the TDMA several times (operation 1406). Next, management information for managing the first temporary defect information TDFL #0 is recorded as first temporary defect management information TDDS #0 in the TDMA (operation 1407). The first temporary defect management information TDDS #0 further includes test location information and write protect information. Thereafter, a pointer to the location of the first temporary defect information TDFL #0, a pointer to the location of the first temporary defect management information TDDS #0, and the write protect information are recorded in the drive & disc information area of the disc 100 (operations 1408 and 1409).

Alternatively, a pointer for temporary management information TDMA #i, other than the temporary defect information TDFL #i and the temporary defect management information TDDS #i, may be recorded in operation 1408.

Next, it is checked whether the data needs to be finalized (operation 1410). If it is determined in operation 1410 that the finalizing of the disc 100 is not required, operations 1401 through 1409 are repeated. Whenever operations 1401 through 1409 are repeated, indexes i given to each recording operation, temporary defect information TDFL, and temporary defect management information TDDS are increased by 1 (operation 1411). If it is determined in operation 1410 that the finalizing of the disc 100 is needed, a last recorded temporary defect information TDFL #i and a last recorded temporary defect management information TDDS #i are recorded as final defect information DFL and the final defect management information DDS in the DMA (operation 1412). The final defect information DFL and the final defect management information DDS may be recorded several times to increase the reliability of data detection. Similarly, the verify-after-write method may be performed on the final recorded defect information and defect management information. If a defect is detected in this information, an area of the disc 100 having the defect and the following area containing data may be regarded as being unavailable (i.e., the areas are collectively designated as a defective area), and the final temporary defect management information and temporary defect information may be again recorded after the defective area. Alternatively, the write protect information, which is stored in the drive & disc information area or included in lastly recorded temporary defect

management information TDDS #i, may further be recorded in the DMA. While described as being increased by 1, it is understood that the index in the methods shown in FIGs. 13A through 14B could instead be based on other numbers.

The aforementioned defect management may be embodied as a computer program that can be run by a computer, which can be a general or special purpose computer. Thus, it is understood that the controller 2 can be such a computer. Codes and code segments, which constitute the computer program, can be easily reasoned by a computer programmer in the art. The program is stored in a computer readable medium readable by the computer. When the program is read and run by a computer, the defect management is performed. Here, the computer-readable medium may be a magnetic recording medium, an optical recording medium, a carrier wave, firmware, or other recordable media.

During reproduction, the recording and/or reproducing apparatus utilizes the defect information and the defect management information in the defect management area and/or the temporary defect management area in order to access the recorded user data. While described in terms of a recording and/or reproducing apparatus as shown in FIG. 1, it is understood that the apparatus can be an individual recording or reproducing apparatus or a recording and reproducing apparatus.

While described in terms of use with write-once disks, it is understood that the present invention can be used with other writeable discs, including re-writeable recording media.

As described above, an aspect of the present invention provides a disc defect management method suitable for use with write once discs. According to an aspect of the present invention, at least one temporary defect information area is present in a lead-in area of a disc and/or a lead-out area, so that information regarding a defect that exists in the disc can be accumulatively recorded. Also, it is easy to finalize the disc by reading only lastly recorded temporary defect information from a temporary defect information area and recording the read information in a defect management area, thereby enabling effective use of the DMA. Accordingly, user data can be recorded on discs (even on write once discs) while performing disc defect management, thereby allowing backup operations to be performed without interruptions. Further, it is

possible to change write protect information or perform disc defect management even after recording the write protect information in a disc. Also, even if a disc drive does not access a drive & disc information area and test location information or write protect information is not obtained, the temporary defect management information further  
5 includes the test location information and the write protect information. Accordingly, it is possible to directly access a test area and prevent data from being recorded in an improper area. In addition, it is possible to increase the reliability of a system by recording the test location information and the write protect information as temporary defect management information even if a user does not desire to perform disc defect  
10 management.

While this invention has been particularly shown and described with reference to embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the accompanying claims and equivalents thereof.

## CLAIMS

1. A write once disc for use with a recording and/or reproducing apparatus, the disc comprising:

5 a record layer in which a lead-in area, a data area, and a lead-out area are sequentially positioned;

a defect management area in at least one of the lead-in area and the lead-out area;

10 a temporary defect management area in at least one of the lead-in area and the lead-out area and which includes temporary defect information and temporary defect management information including drive & disc information; and

15 a drive & disc information area in at least one of the lead-in area and the lead-out area and which includes information regarding locations of the temporary defect information and the temporary defect management information used by the recording and/or reproducing apparatus in performing defect management,

wherein a last recorded temporary defect information and a last recorded temporary defect management information, which are lastly recorded in the temporary defect management area are recorded in the defect management area for disc finalization by the recording and/or reproducing apparatus.

20

2. A write once disc for use with a recording and/or reproducing apparatus, the disc comprising:

a first record layer including, sequentially, a lead-in area, a data area, and a first lead-out area ;

25 a second record layer including, sequentially, an outer area, a data area, and a second lead-out area;

a defect management area in at least one of the lead-in area, the first lead-out area, the second lead out area, and the outer area;

30 a temporary defect management area in at least one of the lead-in area, the first lead-out area, the second lead out area, and the outer area, and which includes temporary defect information and temporary defect management information, which includes drive & disc information, used by the recording and/or reproducing apparatus in performing defect management; and



a drive & disc information area that is present in at least one of the lead-in area, the first lead-out area, the second lead out area, and the outer area, and which includes information regarding locations of the temporary defect information and temporary defect management information,

5 wherein a last recorded temporary defect information and a last recorded temporary defect management information, which are lastly recorded in the temporary defect management area, are recorded in the defect management area, for disc finalization.

10 3. The write once disc of claim 1, wherein write protect information is further recorded in the drive & disc information area.

4. The write once disc of claim 3, wherein:  
the data is written to the data area in discrete recording operations, and  
15 the write protect information is recorded for each of the recording operations.

5. The write once disc of claim 1, wherein the drive & disc information comprises at least one of the write protect information and the test location information.

20 6. The write once disc of claim 1, wherein the temporary defect information and the temporary defect management information are recorded in each recording operation in which data is recorded in the data area.

7. The write once disc of claim 1, comprising a plurality of at least one of the  
25 defect management area, the temporary defect management area, and the drive & disc information area.

8. The write once disc of claim 1, comprising a plurality of at least one of the temporary defect management area and the drive & disc information area more than  
30 once in the same area.

9. The write once disc of claim 1, further comprising a combined area including the temporary defect management area and the drive & disc information area.

10. A method of managing disc defects, comprising:

recording information regarding a defect in data, which is recorded in a data area of a disc according to an  $i$ th recording operation, as  $i$ th temporary defect information

several times in a temporary defect management area of the disc, where  $i$  is an index;

recording information for managing the  $i$ th temporary defect information as  $i$ th temporary defect management information in the temporary defect management area;

recording information regarding locations of the  $i$ th temporary defect information and the temporary defect management information in a drive & disc information area of the disc;

repeating the recording the  $i$ th temporary defect information, the recording the  $i$ th temporary defect management information, and the recording the information regarding the locations at least once while increasing the index given to the recording operation, the temporary defect information, and the temporary defect management information;

and

recording a last recorded one of the temporary defect information and temporary defect management information in a defect management area of the disc for disc finalization.

11. The method of claim 10, further comprising recording write protect information in the drive & disc information area.

12. The method of claim 10, wherein during the recording the  $i$ th temporary defect management information, the  $i$ th temporary defect management information is recorded to include at least one of test location information and the write protect information.

13. The method of claim 10, wherein the recording the  $i$ th temporary defect information further comprises:

recording the data in predetermined units;

verifying the recorded data to detect a defective area of the disc in which the defect exists;

storing information that points to the defective area and information that points to a replacement area for the defective area as the first temporary defect information in a memory;

repeating the recording the data in the predetermined units, the verifying the recorded data, and the storing the information at least once; and

reading the information stored in the memory and recording the read information as the ith temporary defect information several times in the temporary defect management area.

14. A recording and/or reproducing apparatus for use with a disc, comprising: a recording/reading unit that records data on and/or reads data from a data area of the disc; and

a controller that controls the recording/reading unit to:

record information regarding a defect in the data recorded in the data area, as temporary defect information in a temporary defect management area of the disc;

record management information for managing the temporary defect information as temporary defect management information in the temporary defect management area, the management information further including drive & disc information;

record information regarding locations of the temporary defect information and the temporary defect management information in a drive & disc information area of the disc; and

record a last recorded temporary defect information and temporary defect management information in a defect management area of the disc during disc finalization.

15. The recording and/or reproducing apparatus of claim 14, wherein the controller controls the recording/reading unit to further record write protect information in the drive & disc information.

16. The recording and/or reproducing apparatus of claim 14, wherein the controller controls the recording/reading unit to record the data in the data area in discrete recording operations, and to record the temporary defect information and the temporary defect management information for each of the recording operations.

5

17. The recording and/or reproducing apparatus of claim 14, wherein the controller controls the recording/reading unit to record the data in the data area in discrete recording operations, and to record the temporary defect management information to include test location information and write protect information for each of the recording operations.

10

18. The write once disc of claim 1, wherein the drive & disc information comprises information on a location of a test area of the disc and write protect information on whether information can be written to the disc.

15

19. The write once disc of claim 18, wherein the drive & disc information is also included in the drive & disc information area.

20. The write once disc of claim 19, wherein the drive & disc information area further includes information on a type of the disc, information on a drive used for a write and/or read operation.

20

21. The write once disc of claim 1, wherein the temporary defect management area further includes an address of a last recorded unit of user data and an address of a last recorded unit of replacement data which was recorded to replace a defective area.

25

22. The write once disc of claim 2, wherein the drive & disc information comprises information on a location of a test area of the disc and write protect information on whether information can be written to the disc.

30

23. The write once disc of claim 22, wherein the drive & disc information is also included in the drive & disc information area.

24. The write once disc of claim 23, wherein the drive & disc information area further includes information on a type of the disc, information on a drive used for a write and/or read operation.

5

25. The write once disc of claim 2, wherein the temporary defect management area further includes an address of a last recorded unit of user data and an address of a last recorded unit of replacement data which was recorded to replace a defective area.

10

26. A recordable disc for use with a recording and/or reproducing apparatus, the disc comprising:

a lead-in area;

a lead-out area;

15

a data area disposed between the lead-in and lead-out areas and in which data is recorded and/or from which data is reproduced;

a temporary defect management area in at least one of the lead-in area and the lead-out area and which includes temporary defect management information used by the recording and/or reproducing apparatus in accounting for defects in the disc; and

20

a drive & disc information area in at least one of the lead-in area and the lead-out area and which includes information regarding a location of the temporary defect management information.

27. The recordable disc of claim 26, wherein the temporary defect management area further includes temporary defect information managed by the temporary defect management information and used by the recording and/or reproducing apparatus in performing defect management, and information regarding a location of temporary defect information is recorded in the drive & disc information area.

30

28. The recordable disc of claim 27, wherein:  
the data is recorded in corresponding recording units,

each recording unit has a corresponding pair of the temporary defect information and temporary defect management information for performing defect management with respect to at least the recording unit, and

the location of the temporary defect information comprises a location of an area in which is recorded a corresponding pair of the temporary defect information and the temporary defect management information for a corresponding recording unit.

29. The recordable disc of claim 26, wherein the drive & disc information area further includes write protection information with regard to recorded data in the data area.

30. The recordable disc of claim 29, wherein the drive & disc information area further includes a recordable area such that, if the write protection information indicates that the disc is write protected, additional write protection information is writeable to the recordable area such that the recording and/or reproducing apparatus can change a write protection status of the disc to again allow recording in the data area.

31. The recordable disc of claim 26, wherein the drive & disc information area further includes information about a type of drive and information about a type of disc.

32. The recordable disc of claim 26, further comprising a test area in which the data is not to be recorded and in which the recording and/or reproducing apparatus performs a test on the disc, wherein the drive & disc information area further includes information about the test area.

33. The recordable disc of claim 26, wherein the temporary defect management information further includes write protection information with regard to recorded data in the data area.

34. The recordable disc of claim 26, wherein temporary defect management information further includes information about a type of drive and information about a type of disc.

35. The recordable disc of claim 26, further comprising a test area in which the data is not to be recorded and which is reserved for the recording and/or reproducing apparatus to perform a test on the disc, wherein the temporary defect management information further includes information about the test area.

5

36. The recordable disc of claim 26, further comprising a spare area in which is recorded replacement data which is used by the recording and/or reproducing apparatus to replace a portion of the data area in which a defect is detected,

wherein the temporary defect management information further includes data  
10 location information about a location of a last recorded portion of the data and replacement location information about a location of a last recorded portion of the replacement data.

37. A recording and/or reproducing apparatus for use with a disc, comprising:  
15 a recording/reading unit that records data on and/or reads data from a data area of the disc; and

a controller that controls the recording/reading unit to:

record information regarding a defect in the data recorded in the data area as temporary defect information in a temporary defect management area of the disc if  
20 defect management is being performed;

record management information including information for managing the temporary defect information as temporary defect management information in the temporary defect management area; and

record information regarding a location of the temporary defect  
25 management information in a drive & disc information area of the disc.

38. The recording and/or reproducing apparatus of claim 37, wherein, when the controller is performing defect management and the temporary defect information is recorded in the temporary defect management area, the controller controls the  
30 recording/reading unit to record information regarding a location of temporary defect information in the drive & disc information area.

39. The recording and/or reproducing apparatus of claim 38, wherein:

the controller controls the data to be recorded in corresponding recording units,  
for each recording unit, the controller records a corresponding pair of the  
temporary defect information and temporary defect management information for  
performing defect management with respect to at least the recording unit in the  
5 temporary defect management area, and

the location of the temporary defect information recorded in the disc & drive  
information area comprises the location of an area in which is recorded a corresponding  
pair of the temporary defect information and the temporary defect management  
information for a corresponding recording unit.

10

40. The recording and/or reproducing apparatus of claim 37, wherein:  
the drive & disc information area further includes information about a type of the  
recording and/or reproducing apparatus and information about a type of the disc, and  
the controller uses the information of the type of the recording and/or  
15 reproducing apparatus and the type of the disc in recording and/or reproducing the data  
with respect to the data area.

20

41. The recording and/or reproducing apparatus of claim 37, wherein:  
the drive & disc information area further includes write protection information with  
regard to recorded data in the data area, and  
the controller does not record the data where the write protection status indicates  
that the disc is write protected.

25

42. The recording and/or reproducing apparatus of claim 41, wherein:  
the drive & disc information area further includes a recordable area, and  
even if the write protection information indicates that the disc is write protected,  
the controller records additional write protection information to the recordable area such  
that the recording and/or reproducing apparatus can change a write protection status of  
the disc to again allow recording in the data area.

30



43. The recording and/or reproducing apparatus of claim 41, wherein, even if the write protection information indicates that the disc is write protected, the controller records the temporary defect management information, the temporary defect information, and/or replacement data for data which is recorded in a defective portion of the data area so as to perform defect management for the write protected disc.

44. The recording and/or reproducing apparatus of claim 37, wherein:  
the disc further comprises a test area in which the data is not to be recorded and which the controller recognizes as being reserved for the recording and/or reproducing apparatus to perform a test on the disc, and  
the controller detects a location of the test area from information recorded in the drive & disc information area.

45. The recording and/or reproducing apparatus of claim 37, wherein:  
the controller records write protection information in the temporary defect management information, and  
the controller uses the write protection information to determine whether additional data can be written to the data area.

46. The recording and/or reproducing apparatus of claim 37, wherein the controller further includes in the temporary defect management information about a type of the recording and/or reproducing apparatus and information about a type of the disc.

47. The recording and/or reproducing apparatus of claim 37, wherein:  
the disc further comprises a test area in which the data is not to be recorded and which the controller recognizes as an area reserved for the recording and/or reproducing apparatus to perform a test on the disc, and  
the controller records in the temporary defect management information a location of the test area.

48. The recording and/or reproducing apparatus of claim 37, wherein:  
the disc further comprises a spare area,

the controller detects a defect in the data recorded in the data area and controls the recording/reading unit to record replacement data to replace a portion of the data area in which the defect is detected,

5 the temporary defect management information further includes data location information about a location of a portion of the data and replacement location information about a location of a portion of the replacement data, and

the controller detects an amount of recordable space in the data area and the spare area using the data location information and the replacement location information recorded in the temporary defect management information.

10

49. A computer readable medium encoded with processing instructions for implementing the method of claim 10 performed by a computer.

FIG. 1

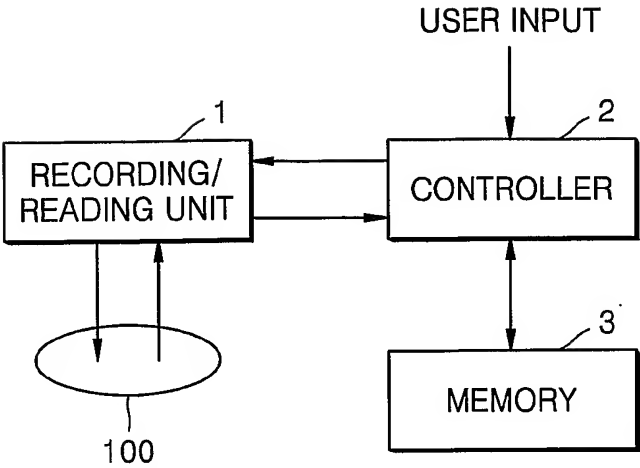


FIG. 2A


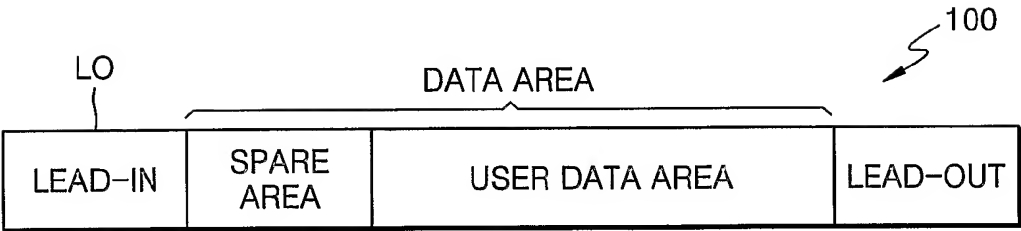


FIG. 2B

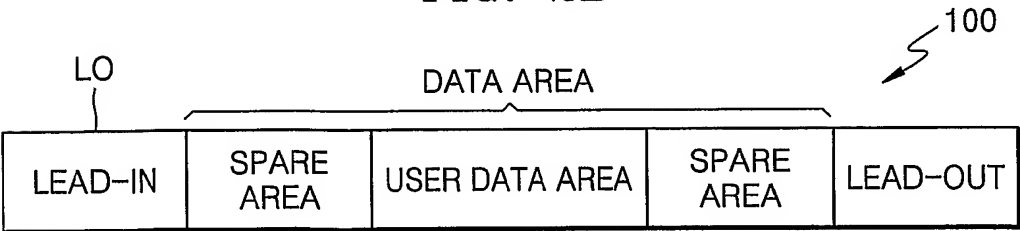

2/18

FIG. 2C

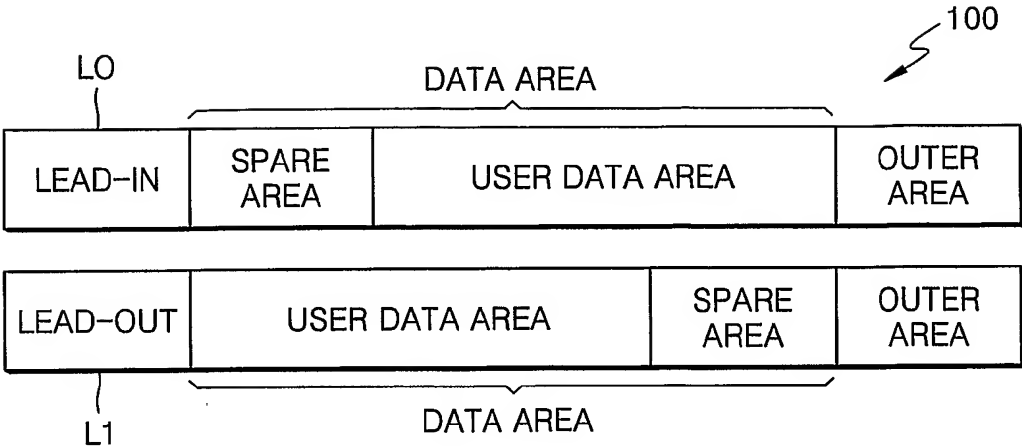


FIG. 2D


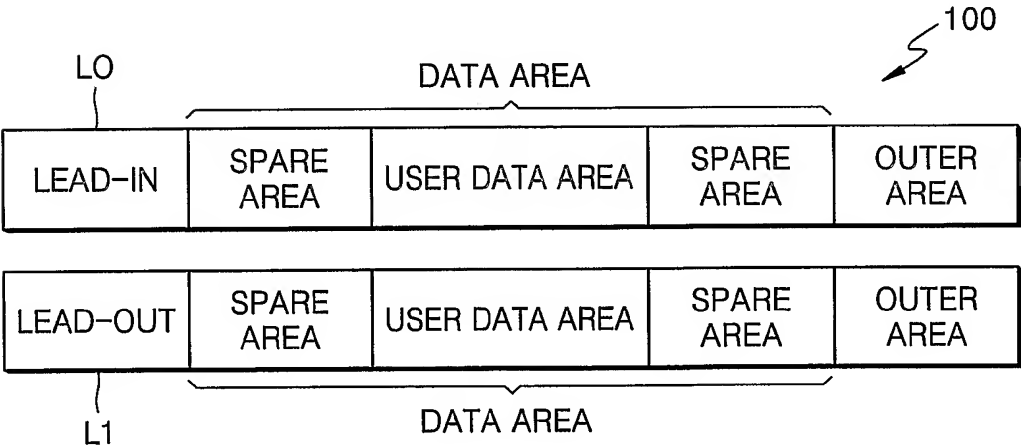


FIG. 3A

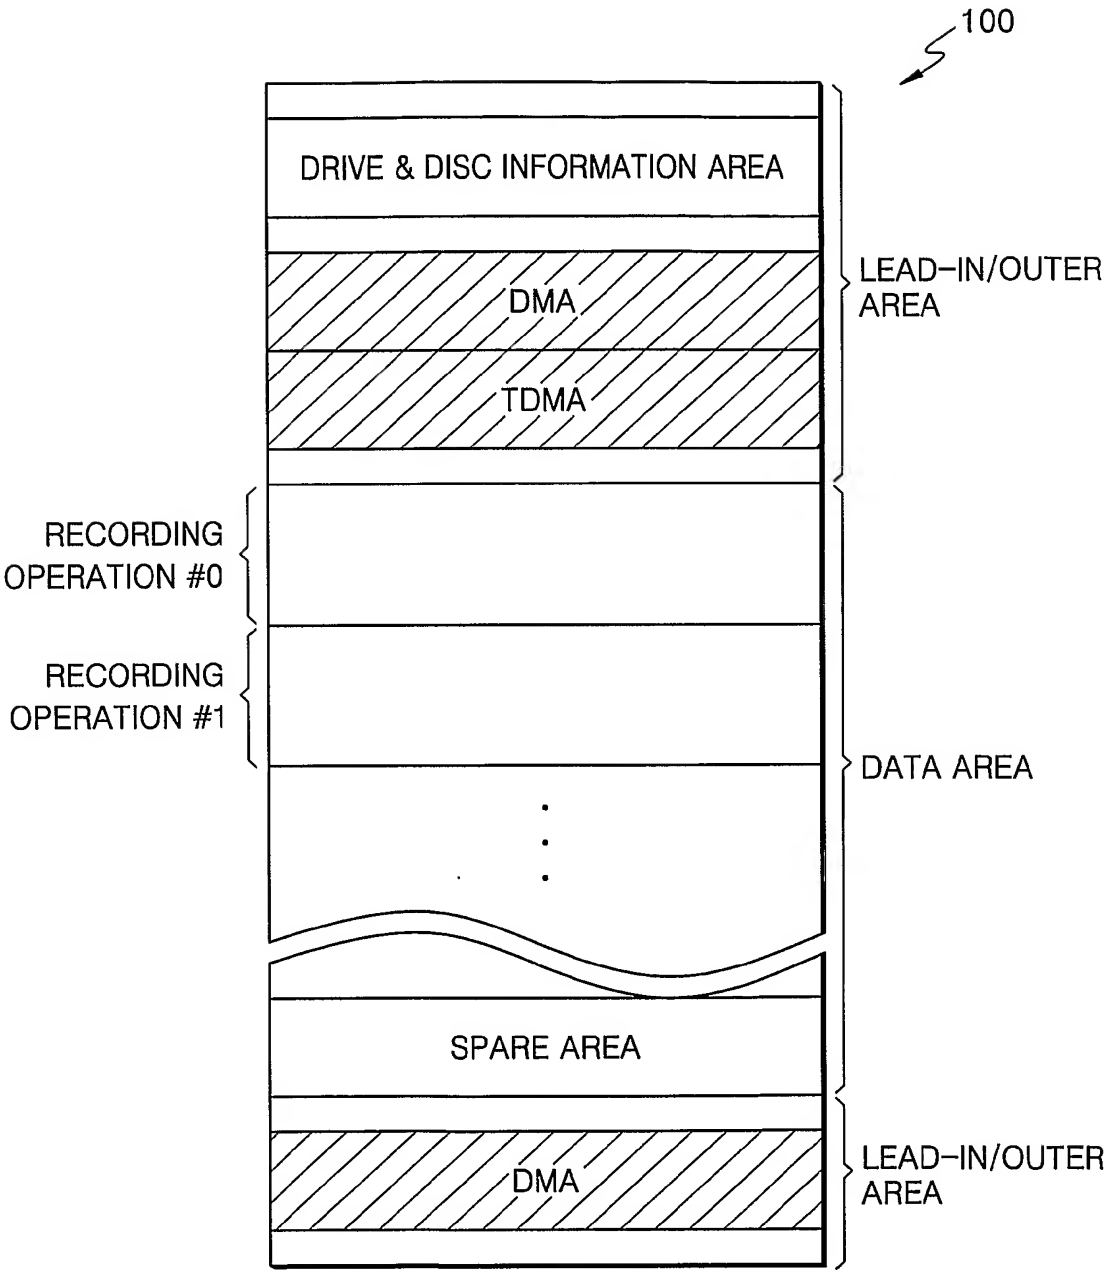

4/18

FIG. 3B



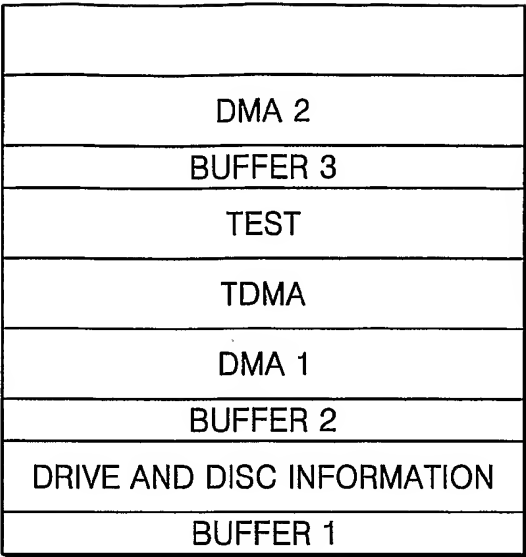


FIG. 4A

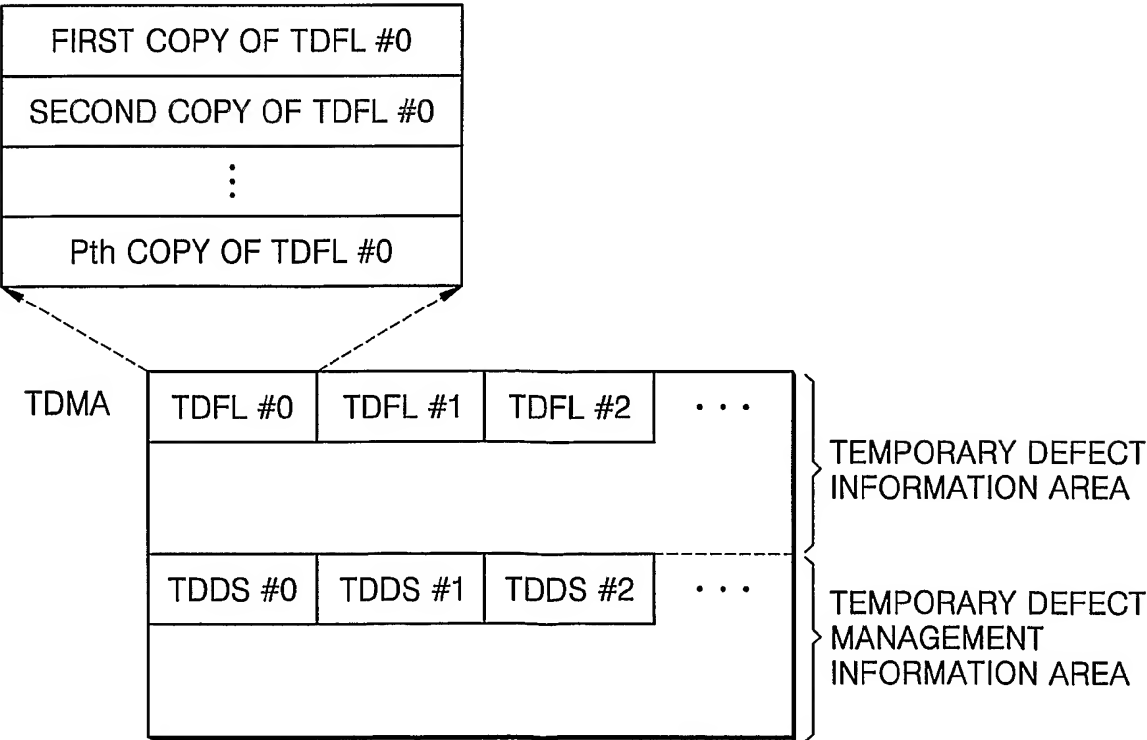


5/18

FIG. 4B

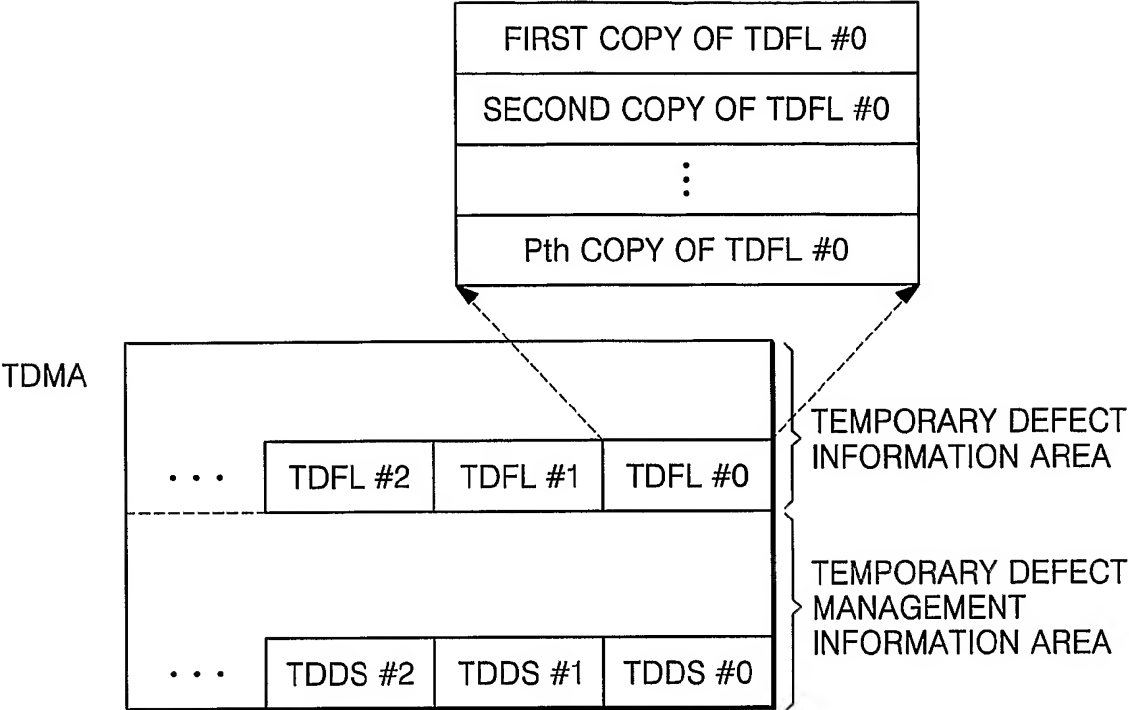

6/18

FIG. 4C

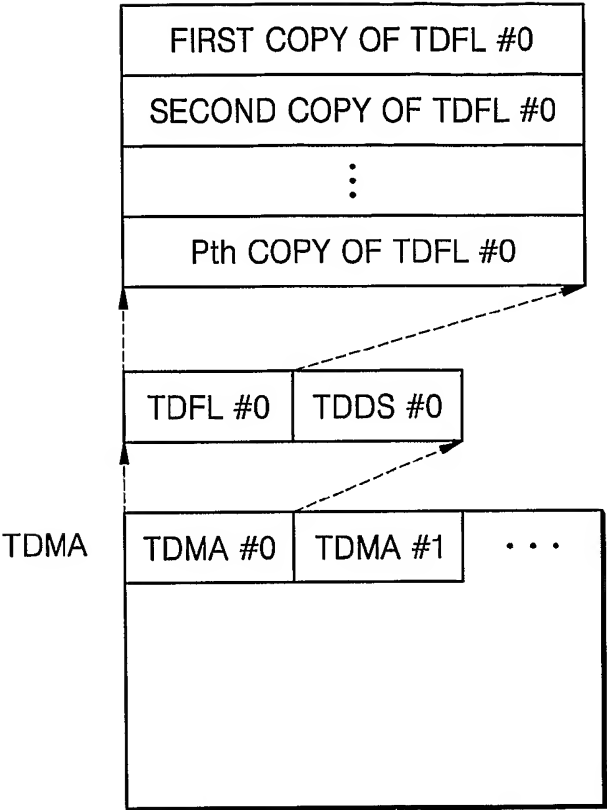



7/18

FIG. 4D


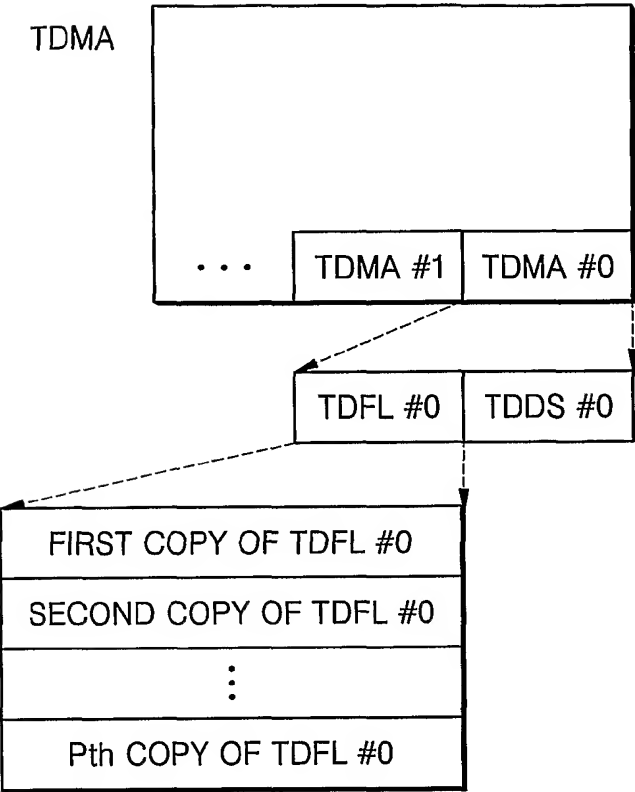


FIG. 5A

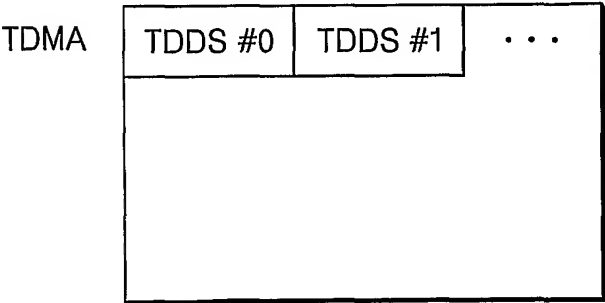

8/18

FIG. 5B



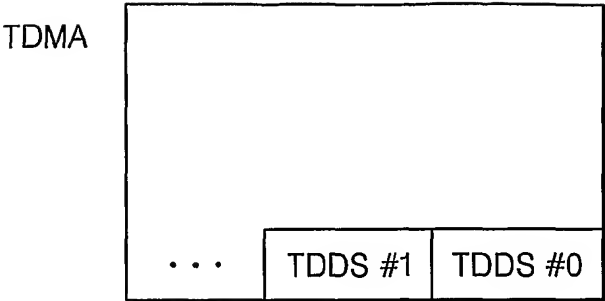


FIG. 6A

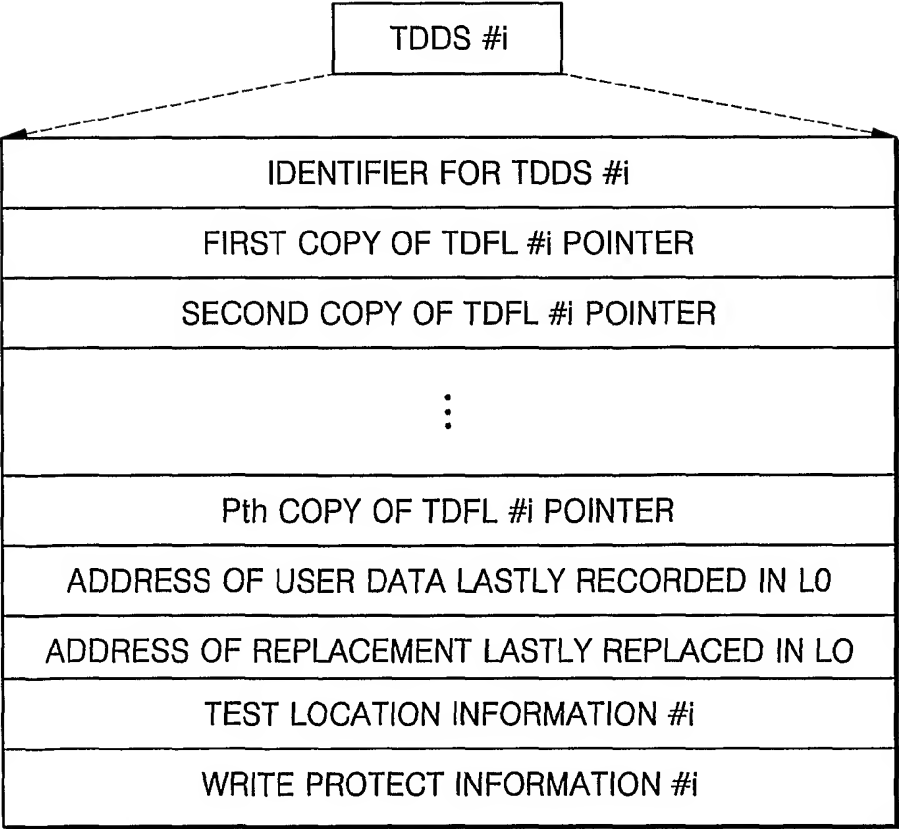


9/18

FIG. 6B

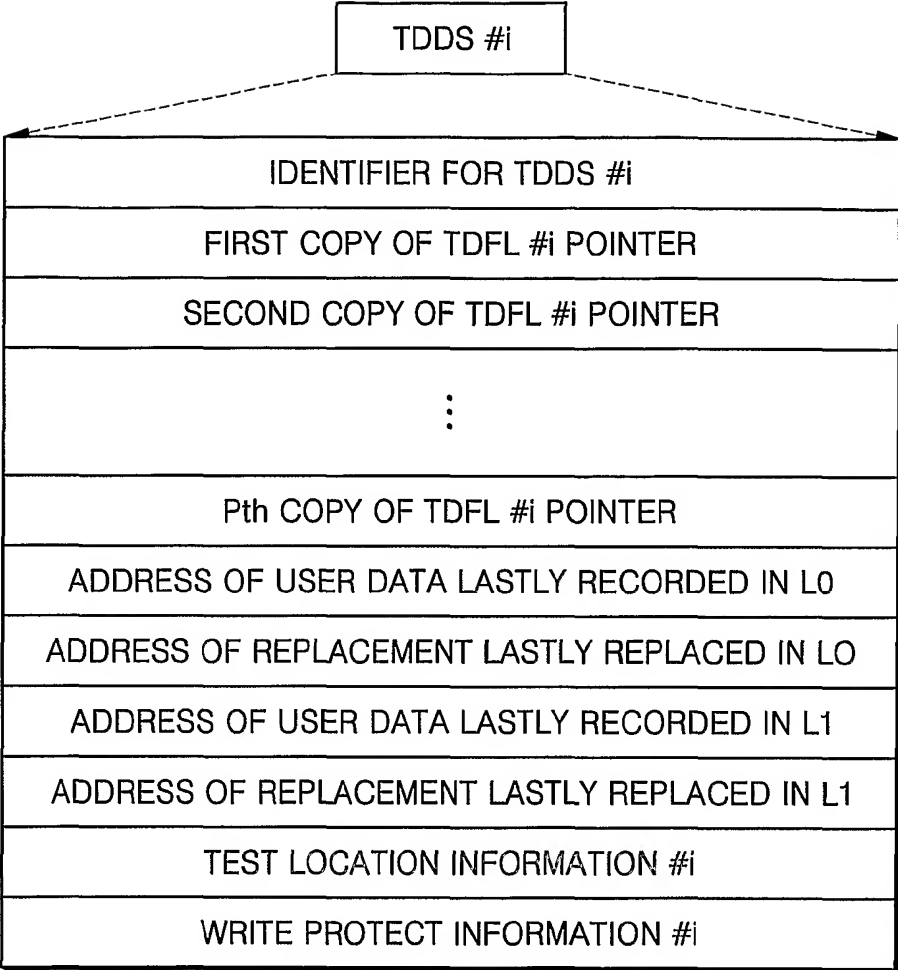

10/18

FIG. 7

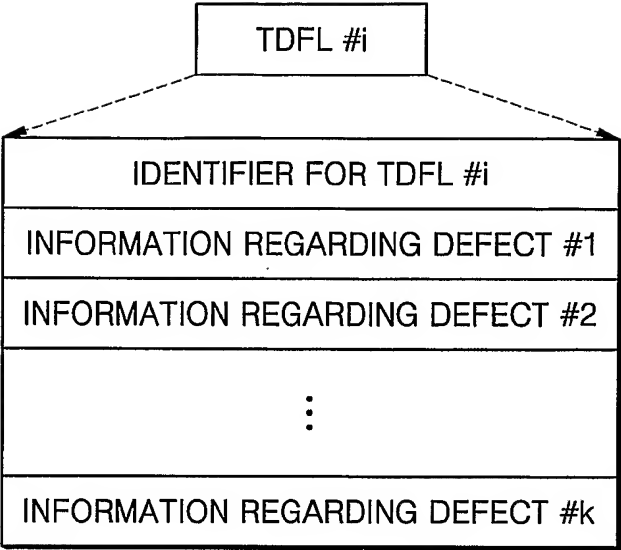

11/18

FIG. 8A

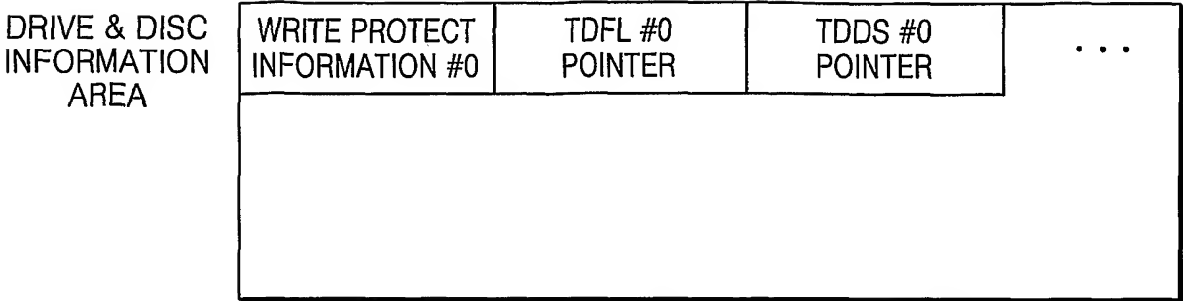


FIG. 8B

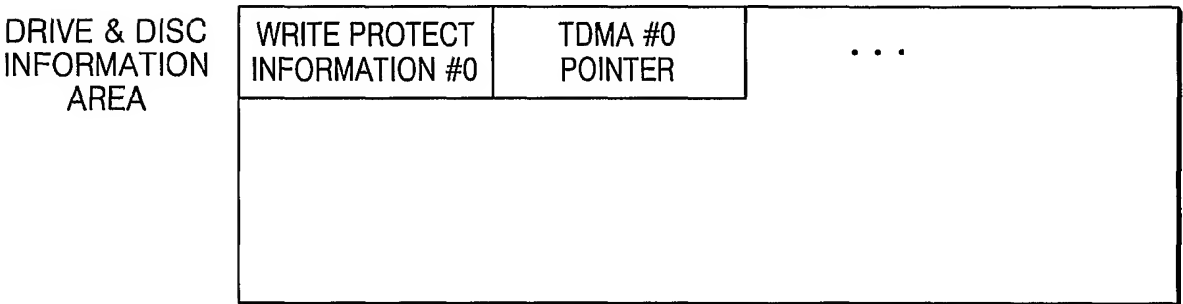


FIG. 9


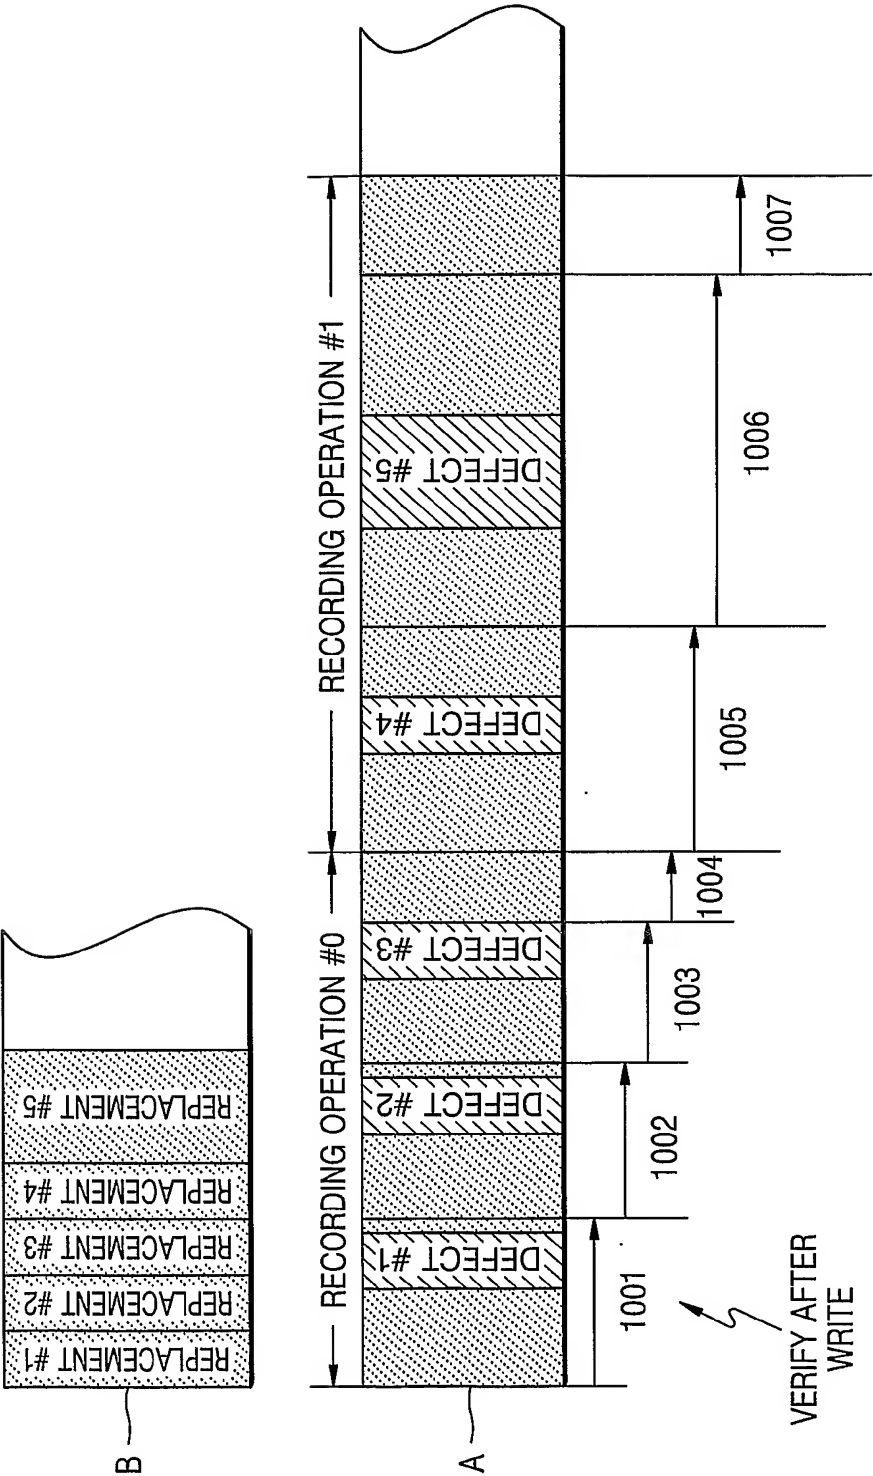


FIG. 10

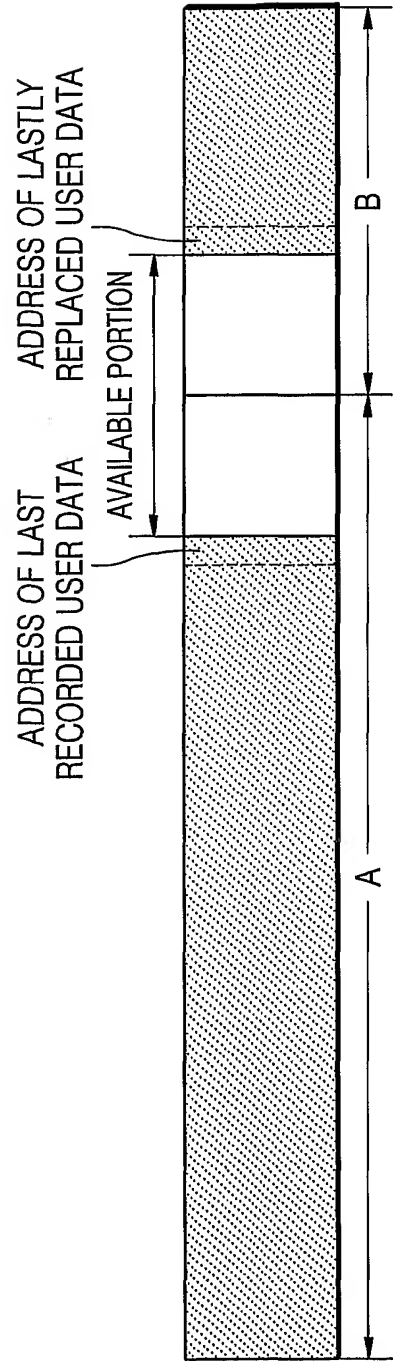

14/18

FIG. 11A

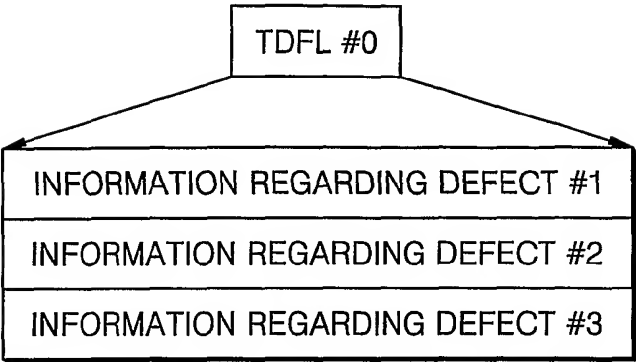


FIG. 11B


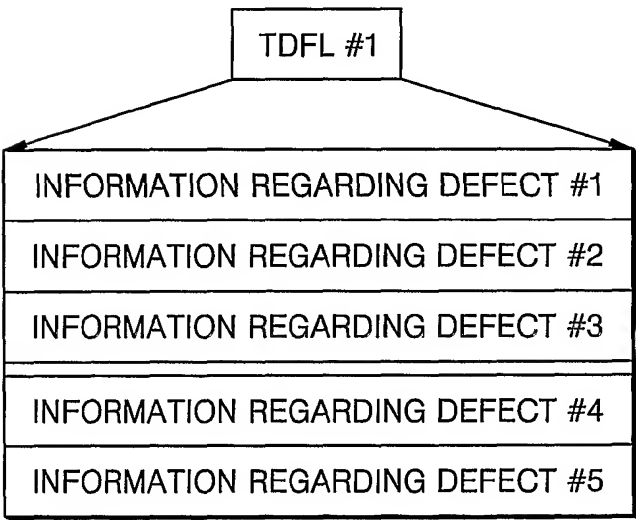



FIG. 12



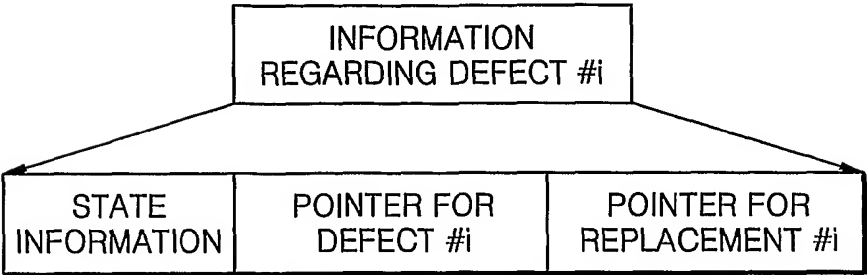


15/18

FIG. 13A

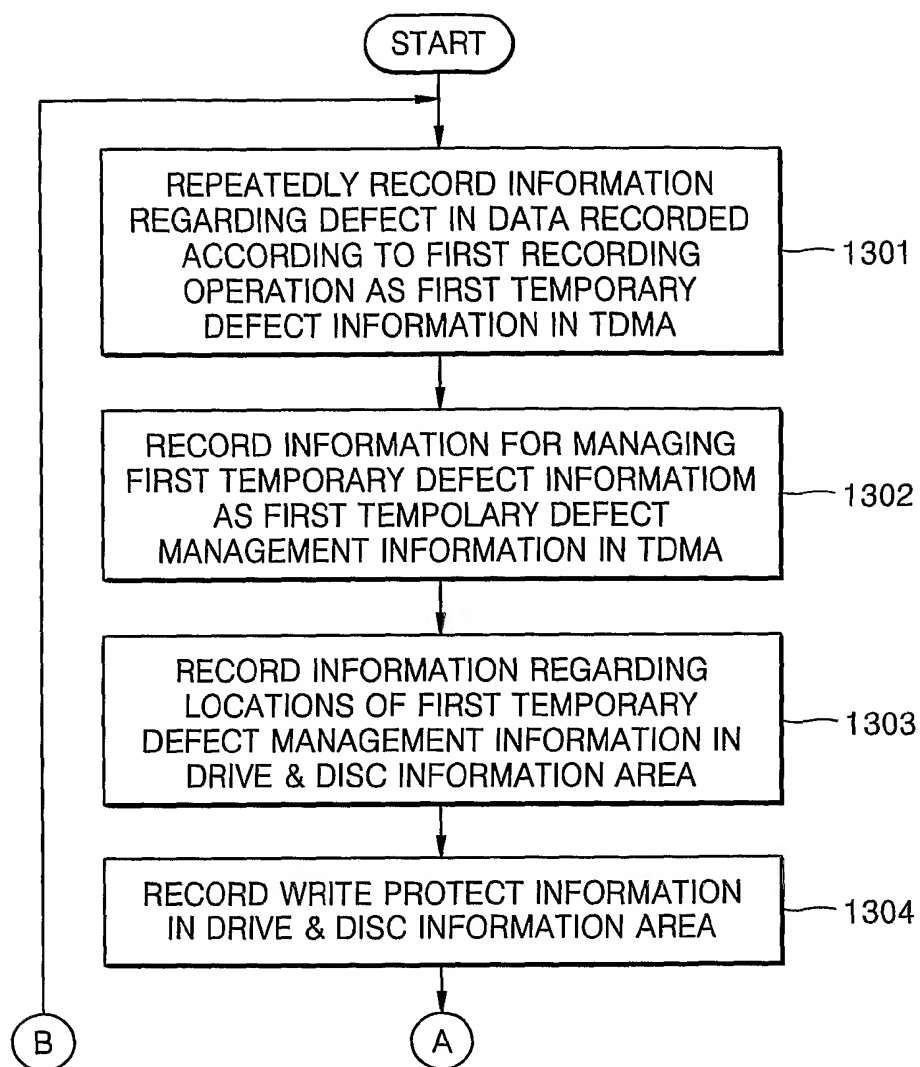


16/18

FIG. 13B

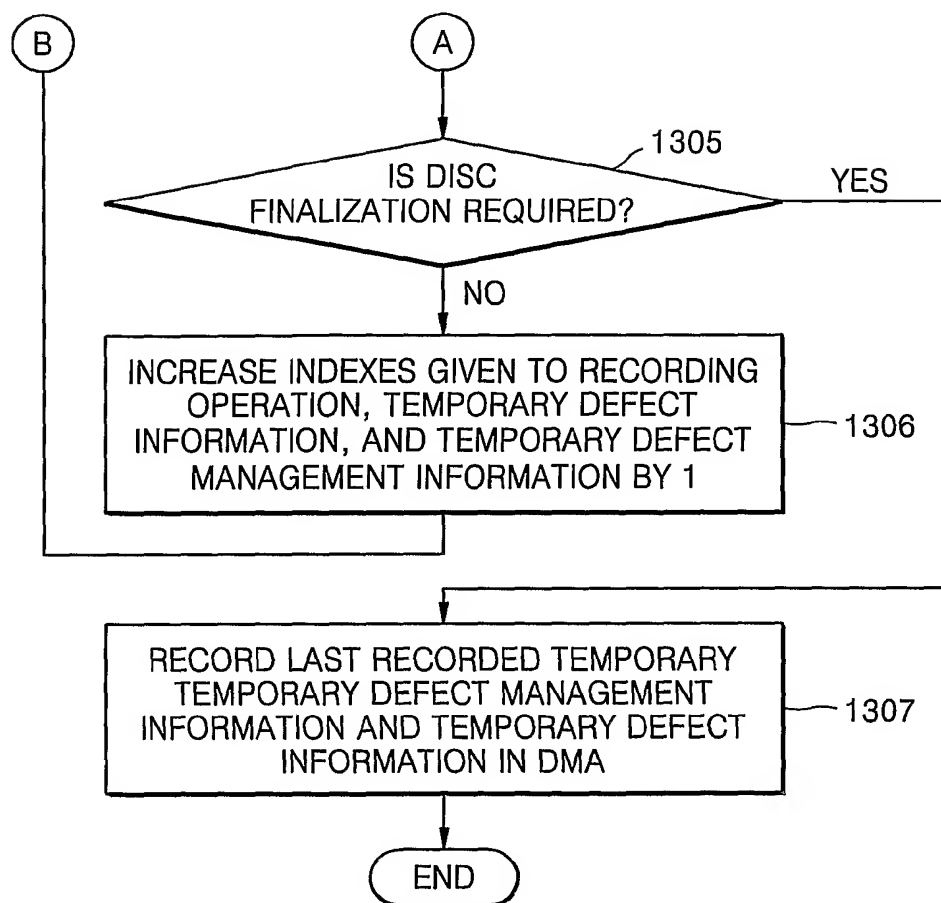


17/18

FIG. 14A

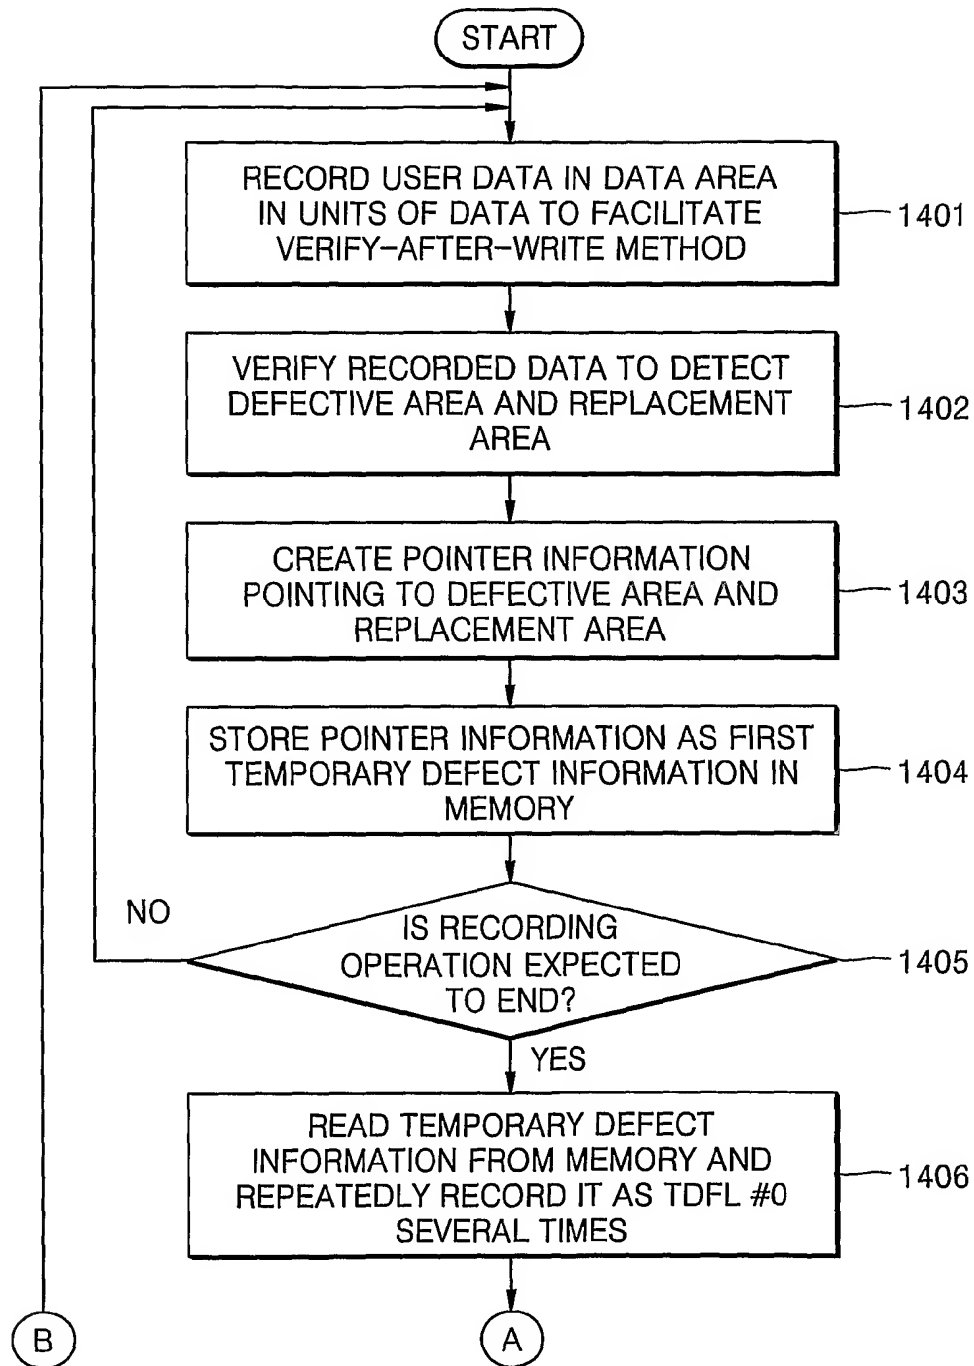

18/18

FIG. 14B

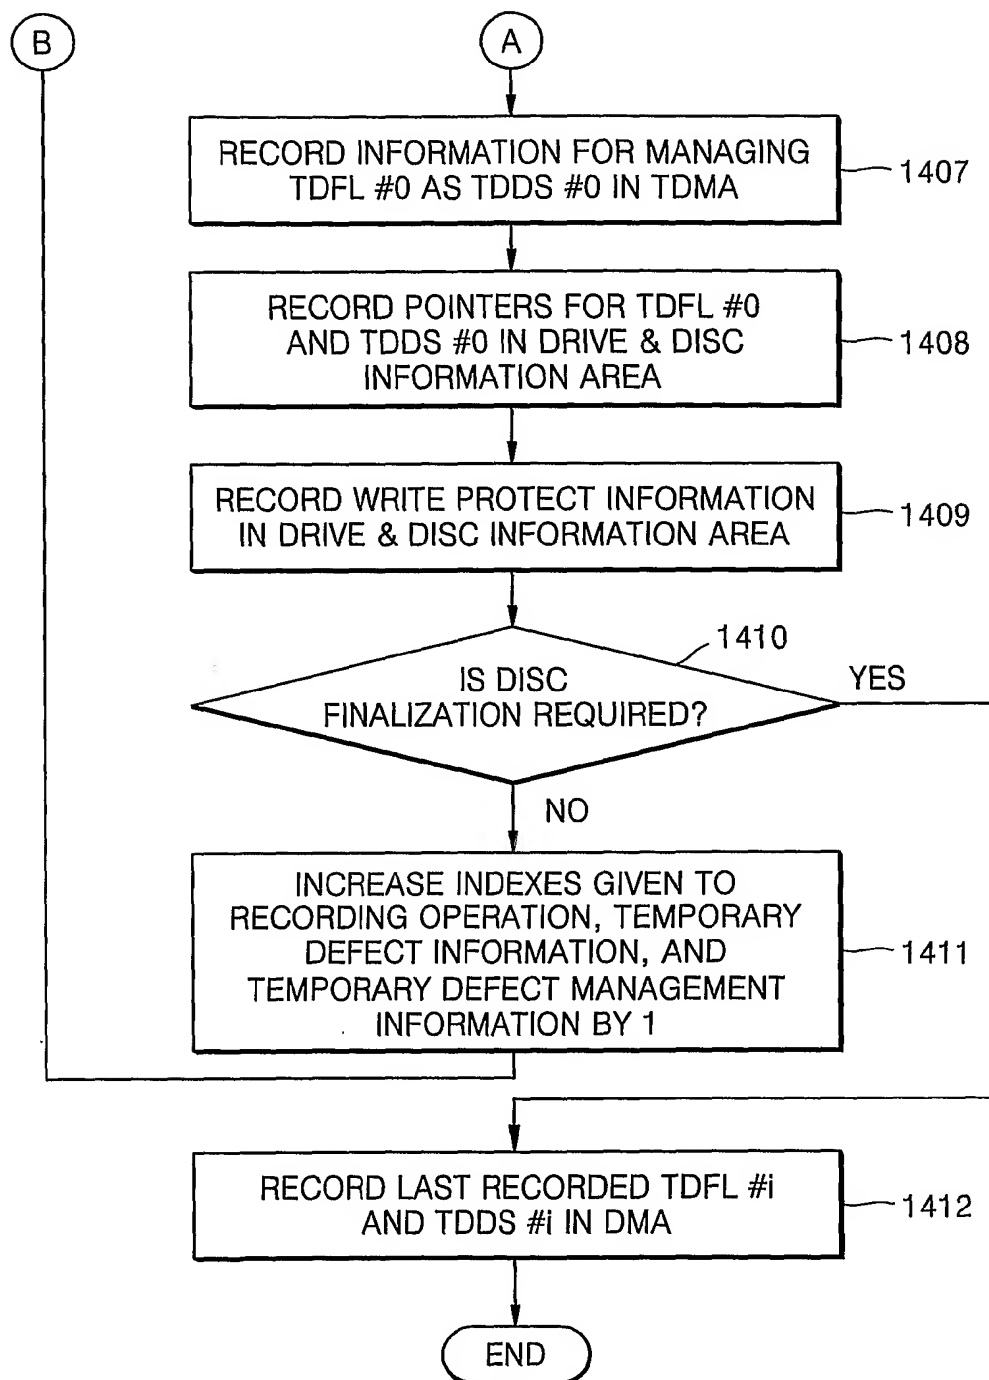

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR2004/000419

**A. CLASSIFICATION OF SUBJECT MATTER****IPC7 G11B 7/007**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

G11B 7/00-G11B 7/24, G11B 20/00-G11B 20/24

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
KOREAN PATENTS AND APPLICATIONS FOR INVENTIONS SINCE 1983

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
WPI,PAJ"lead-in""lead-out","drive","disk","defect""temporary"

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	KR 2000-24996A (Samsung Electronics Co. Ltd.) 06 May 2000 See the whole document.	1,2,10,14, 26, 37
A	KR 2000-67652 A (LG Electronics Inc.) 25 November 2000 See abstract and all claims.	1,2, 10, 14, 26, 37
A	KR 2001-111248 A (LG Electronics Inc.) 17 Dec. 2001 See abstract and all claims.	1,2,10, 14, 26, 37
A	KR 2003-76542 A (Mitsubishi Chem Co.) 26 Sept. 2003 (분할) See abstract.	1
A	JP 07-311942 A (Hitachi Ltd.)28 November 1995 See abstract	1
A	KR 1997-9668 A (Toshiba Corp.) 13 Oct. 1997. See abstract and all claims.	1
A	KR 2000-24996 A (Samsung Electronics Co. Ltd.) 06 May 2000 See abstract and all claims.	1



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

17 JUNE 2004 (17.06.2004)

Date of mailing of the international search report

18 JUNE 2004 (18.06.2004)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office  
920 Dunsan-dong, Seo-gu, Daejeon 302-701,  
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

SONG, Jin Suk

Telephone No. 82-42-481-5694

